ESTIMATE

EST-1751 (AI)

YICN Roofing

675 Alpha Dr
216-777-7154
yicnteam@gmail.com

To

Bill Foster

216-695-3908
20749 Bowling Green Road, Maple Heights, OH 44137

Estimate Date: 4/5/2026

#	Description	Qty	Unit	Rate	RCV	ACV
1	Shingles, architectural asphalt	18.57	SQ	$300.00	$5571.00	$5571.00
2	Underlayment, #30 felt	18.57	SQ	$19.23	$357.10	$357.10
3	Ice & water barrier	284.48	LF	$1.55	$440.94	$440.94
4	Starter strip, 3-tab asphalt	209.44	LF	$1.92	$402.12	$402.12
5	Drip edge, metal	209.44	LF	$2.31	$483.81	$483.81
6	Ridge cap, architectural asphalt	52.64	LF	$6.54	$344.27	$344.27
7	Hip cap, architectural asphalt	8.96	LF	$6.54	$58.60	$58.60
8	Valley metal - (W) profile - painted	40.32	LF	$9.23	$372.15	$372.15
9	Step flashing, metal	25.76	LF	$3.46	$89.13	$89.13
10	Remove roof covering, 3-tab composition shingle	18.57	SQ	$57.70	$1071.49	$1071.49

Thank you for your business!

11	R&R Roof vent - off ridge type -	1	EA	$97.54	$97.54	$97.54
12	R&R Flashing - pipe jack -	1	EA	$50.00	$50.00	$50.00
13	remove and replace 5" gutter	35	LF	$8.00	$280.00	$280.00

SUBTOTAL:	**$9618.15**
TOTAL:	**$9618.15**

Thank you for your business!

ROOF MEASUREMENT SUMMARY

20749 Bowling Green Road, Maple Heights, OH 44137

ROOF AREA	ORDER QTY	PITCH	CONFIDENCE
16.6 SQ	**0.0 SQ**	**6/12**	**A**
1,658.48 sq ft	+10% waste	—	88%

LINEAR MEASUREMENTS	Length	Confidence
Ridge	**47.0 LF**	82%
Hip	**8.0 LF**	85%
Valley	**36.0 LF**	78%
Rake	**90.0 LF**	82%
Eave	**97.0 LF**	82%
Step Flashing	**23.0 LF**	75%

WASTE CALCULATION — 1,658.48 sq ft base

Waste %	5%	**10%**	12%	15%	17%	20%
Area (sqft)	1,741	**1,824**	1,857	1,907	1,940	1,990
Squares	17.4	**18.2**	18.6	19.1	19.4	19.9

6 segments detected. Area method: segment_sum.

PROPERTY PHOTOS


20749 Bowling Green Road, Maple Heights, OH 44137

Aerial View — Satellite Imagery




Directional Aerial Views (N / S / E / W)


North View

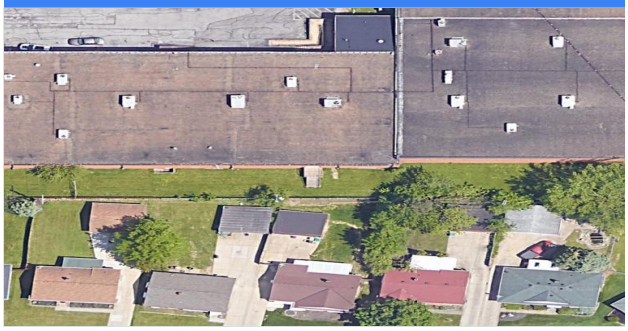


South View

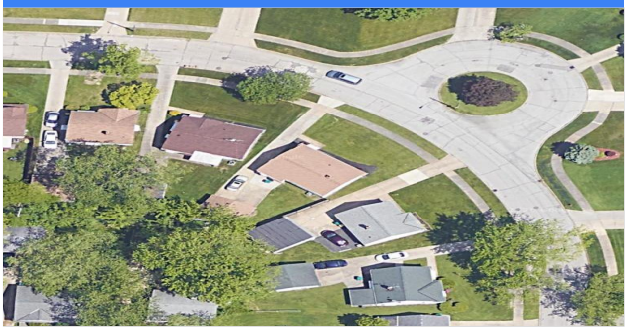

East View

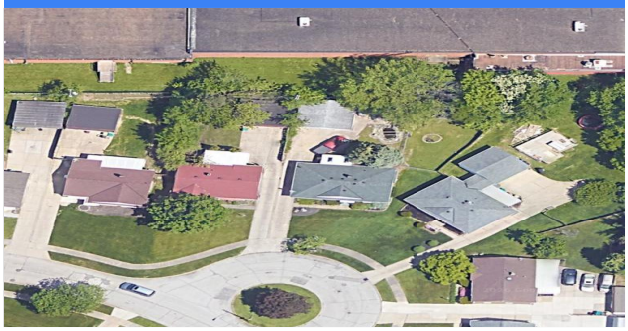

West View

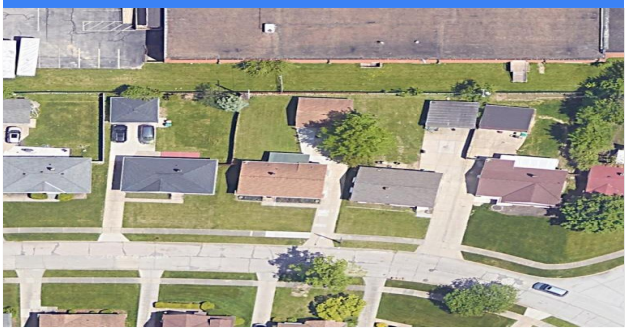

Satellite imagery sourced from Google Maps. Used for reference only.

NOTE:

This price is only valid for 30 days from estimate date, and is based on a deposit of half down upon acceptance of estimate and the remaining half due upon completion of work.

The estimate is hereby based on seen, disclosed, or otherwise obvious damage. The repair of the covered loss may be higher than these figures because of other circumstances not yet discovered. Included in this estimate are the items that the Contractor believes necessary to return the property to pre loss condition.

Unseen, undisclosed, or otherwise not obvious conditions, if discovered later or during the course of repairs, will be considered not included.

If discovered, any necessary additional repairs will be submitted for supplemental coverage, based on current market pricing.

Terms & Conditions:

The following estimate is only an approximation of the damages suffered, or expenses incurred, by the insured. No warranty or representation with regard to the accuracy of the estimate is expressed or implied and none should be inferred. The actual damages suffered, or expenses incurred, could be higher or lower than the estimate, even significantly, depending on variances in a number of factors affecting the estimate and the accuracy of the information and assumptions upon which the estimate is based.

Production Manager

675 Alpha Dr