ESTIMATE

EST-1764 (AI)

YICN Roofing

675 Alpha Dr
216-777-7154
yicnteam@gmail.com

To

Katelyn Lundy

(440) 387-7224
lundykatelyn13@gmail.com
4679 W 226TH ST, FAIRVIEW PARK, Ohio 44126-2515

Estimate Date: 4/15/2026

#	Description	Qty	Unit	Rate	Amount
1	Demo brick/masonry garage structure	1268	SF	$6.50	$8242.00
2	Remove reinforced slab - 6" (Heavy)	576	SF	$5.75	$3312.00
3	Dumpster - 30 yard (incl. tonnage)	4	EA	$750.00	$3000.00
4	6' Chain Link Temp Security Fence	120	LF	$10.50	$1260.00
5	Poured Concrete Footers (Masonry load)	96	LF	$42.00	$4032.00
6	Compacted Gravel Base (4")	576	SF	$1.85	$1065.60
7	Vapor Barrier - 6 mil poly	576	SF	$0.65	$374.40
8	#4 Rebar Grid - 12" O.C.	576	SF	$1.75	$1008.00
9	Concrete Slab - 4000 PSI Reinforced	576	SF	$9.50	$5472.00
10	Concrete Masonry Curb (8" height)	96	LF	$16.00	$1536.00

Thank you for your business!

11	Brick Veneer - Standard Modular	1024	SF	$26.00	$26624.00
12	Steel Lintel - 16' (Garage opening)	1	EA	$950.00	$950.00
13	Steel Lintel - 3' (Entry door)	2	EA	$225.00	$450.00
14	Brick Wall Ties (Corrugated)	1024	SF	$1.15	$1177.60
15	Masonry Weep Holes/Vents	32	EA	$9.50	$304.00
16	Clean Brickwork (Acid Wash)	1024	SF	$1.35	$1382.40
17	2x6 Exterior Wall Framing (Code)	1024	SF	$7.50	$7680.00
18	7/16" OSB Wall Sheathing	1024	SF	$1.85	$1894.40
19	House Wrap (Vapor Barrier)	1024	SF	$0.95	$972.80
20	Header - 18' (Structural)	1	EA	$850.00	$850.00
21	Treated Bottom / Double Top Plates	288	LF	$3.25	$936.00
22	Roof Board Sheathing - 1"x10"	650	SF	$5.25	$3412.50
23	Architectural Shingles (Installed)	8.50	SQ	$550.00	$4675.00
24	Counterflashing - Copper/Lead for Brick	92	LF	$18.50	$1702.00
25	Seamless Aluminum Gutters	90	LF	$11.50	$1035.00
26	Complete Electrical Rewire (to code)	576	SF	$6.50	$3744.00

27	Wall Insulation - R-19 Fiberglass	1024	SF	$2.15	$2201.60
28	Garage Door - 16'x7' (Insulated)	1	EA	$3200.00	$3200.00
29	Garage Door Opener - Belt Drive	1	EA	$750.00	$750.00
30	Entry Doors - Pre-hung Wood	2	EA	$750.00	$1500.00
31	Building/Zoning Permits	1	LS	$1200.00	$1200.00
32	Architectural/Engineering Plans	1	LS	$3500.00	$3500.00

SUBTOTAL:	**$99443.30**


TOTAL:	**$99443.30**

Thank you for your business!

PROPERTY PHOTOS

4679 W 226TH ST, FAIRVIEW PARK, Ohio 44126-2515

Aerial View — Satellite Imagery

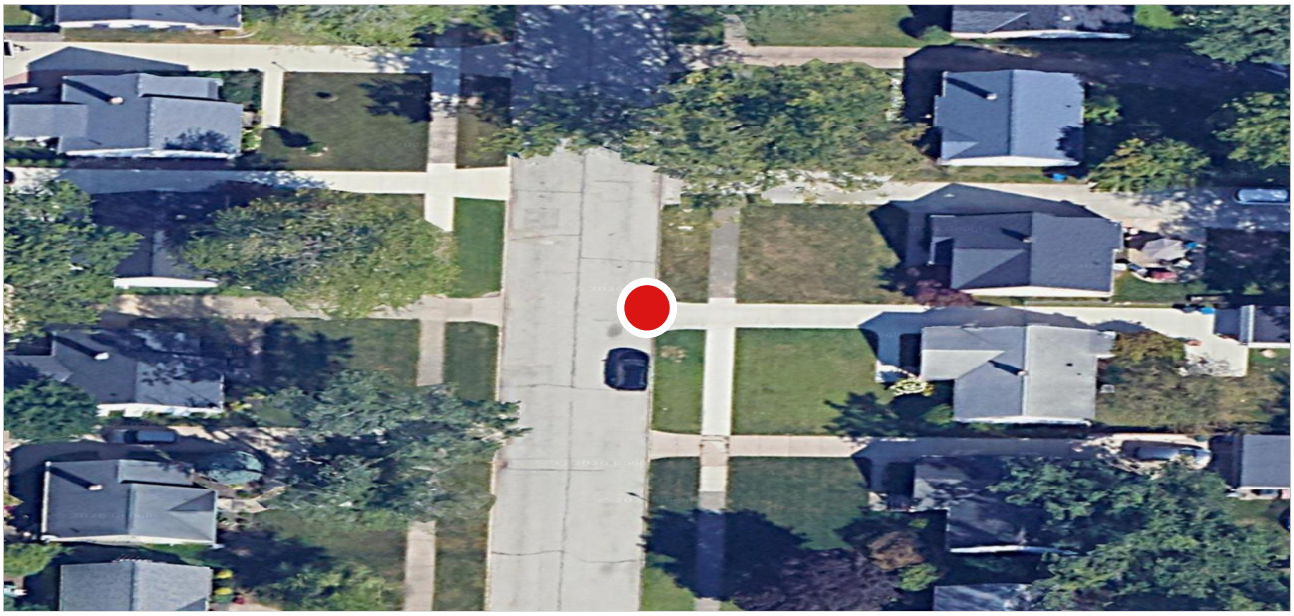


Directional Aerial Views (N / S / E / W)


North View




South View

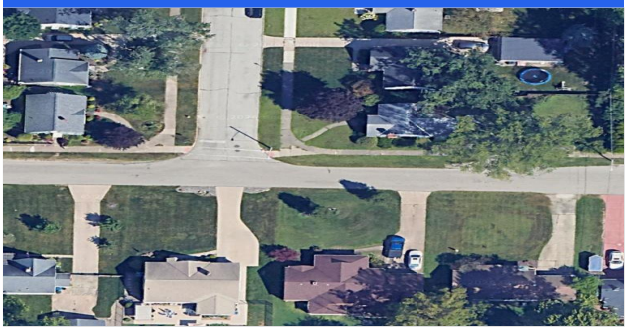

East View

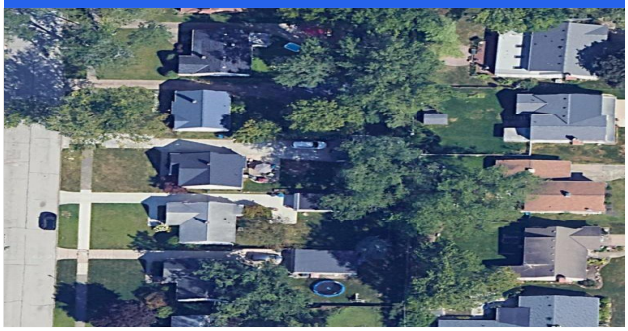

West View

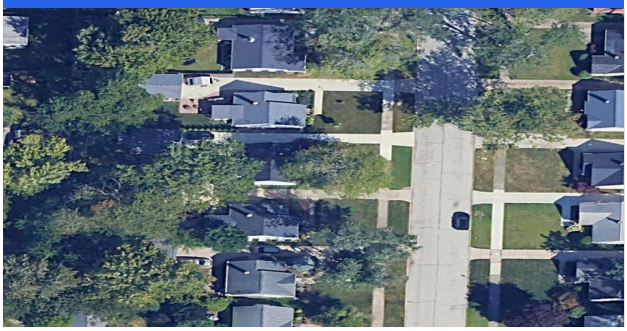

Satellite imagery sourced from Google Maps. Used for reference only.

NOTE:

This price is only valid for 30 days from estimate date, and is based on a deposit of half down upon acceptance of estimate and the remaining half due upon completion of work.

The estimate is hereby based on seen, disclosed, or otherwise obvious damage. The repair of the covered loss may be higher than these figures because of other circumstances not yet discovered. Included in this estimate are the items that the Contractor believes necessary to return the property to pre loss condition.

Unseen, undisclosed, or otherwise not obvious conditions, if discovered later or during the course of repairs, will be considered not included.

If discovered, any necessary additional repairs will be submitted for supplemental coverage, based on current market pricing.

Terms & Conditions:

The following estimate is only an approximation of the damages suffered, or expenses incurred, by the insured. No warranty or representation with regard to the accuracy of the estimate is expressed or implied and none should be inferred. The actual damages suffered, or expenses incurred, could be higher or lower than the estimate, even significantly, depending on variances in a number of factors affecting the estimate and the accuracy of the information and assumptions upon which the estimate is based.

Production Manager

675 Alpha Dr