**YICN Roofing**
216-777-7154
yicnteam@gmail.com

# ESTIMATE

# EST-38 (AI)
July 28, 2026

**PREPARED FOR**

—

13721 Martin Dr, Garfield Heights, OH 44125, USA

**PREPARED BY**

**YICN Roofing**
Date: 7/28/2026
216-777-7154
yicnteam@gmail.com

| # | Description | Qty | Unit | Rate | RCV | ACV |
|---|---|---|---|---|---|---|
| 1 | Laminate - comp. shingle roofing - per SQ | 18.39 | SQ | $273.00 | $5020.47 | $5020.47 |
| 2 | Roofing felt - | 18.39 | SQ | $47.58 | $875.00 | $875.00 |
| 3 | Ice & water barrier | 355.04 | SF | $2.02 | $717.18 | $717.18 |
| 4 | course | 164 | LF | $5.00 | $820.00 | $820.00 |
| 5 | R&R Drip edge | 183.68 | LF | $3.16 | $580.43 | $580.43 |
| 6 | R&R Ridge cap - venting ridge cap shingles | 53.76 | LF | $12.59 | $676.84 | $676.84 |
| 7 | R&R Flashing, 14" wide | 7.84 | LF | $5.52 | $43.28 | $43.28 |
| 8 | Remove 3 tab - 25 yr. - comp. shingle roofing | 18.39 | SQ | $76.31 | $1403.34 | $1403.34 |
| 9 | R&R Flashing - pipe jack - | 1 | EA | $102.17 | $102.17 | $102.17 |
| 10 | *(Unlabeled item)* | 2 | EA | $3.00 | $6.00 | $6.00 |

| | | | | | | |
|---|---|---|---|---|---|---|
| 11 | Ridge Vent Installation (Added to meet 1:300 code - Deficit was 2.74 sq ft) | | | | | |
| | | 22 | LF | $0.00 | $0.00 | $0.00 |

| | |
|---|---|
| **SUBTOTAL:** | **$10244.70** |

| | |
|---|---|
| **TOTAL (RCV):** | **$10244.70** |

# ROOF MEASUREMENT SUMMARY

13721 Martin Dr, Garfield Heights, OH 44125, USA

| ROOF AREA | ORDER QTY | PITCH | CONFIDENCE |
|---|---|---|---|
| **16.4 SQ** | **18.1 SQ** | **4/12** | **A** |
| 1,641.703 sq ft | +10% waste | gable | 86% |


| LINEAR MEASUREMENTS | Length | Confidence |
|---|---|---|
| Ridge | **48.0 LF** | 76% |
| Hip | **0 LF** | 79% |
| Valley | **0 LF** | 72% |
| Rake | **68.0 LF** | 76% |
| Eave | **96.0 LF** | 73% |
| Step Flashing | **7.0 LF** | 61% |

## WASTE CALCULATION — 1,641.703 sq ft base

| Waste % | 5% | **10%** | 12% | 15% | 17% | 20% |
|---|---|---|---|---|---|---|
| **Area (sqft)** | 1,724 | **1,806** | 1,839 | 1,888 | 1,921 | 1,970 |
| **Squares** | 17.2 | **18.1** | 18.4 | 18.9 | 19.2 | 19.7 |


YICN Roofing — Generated 7/28/2026

### Aerial View — Satellite Imagery

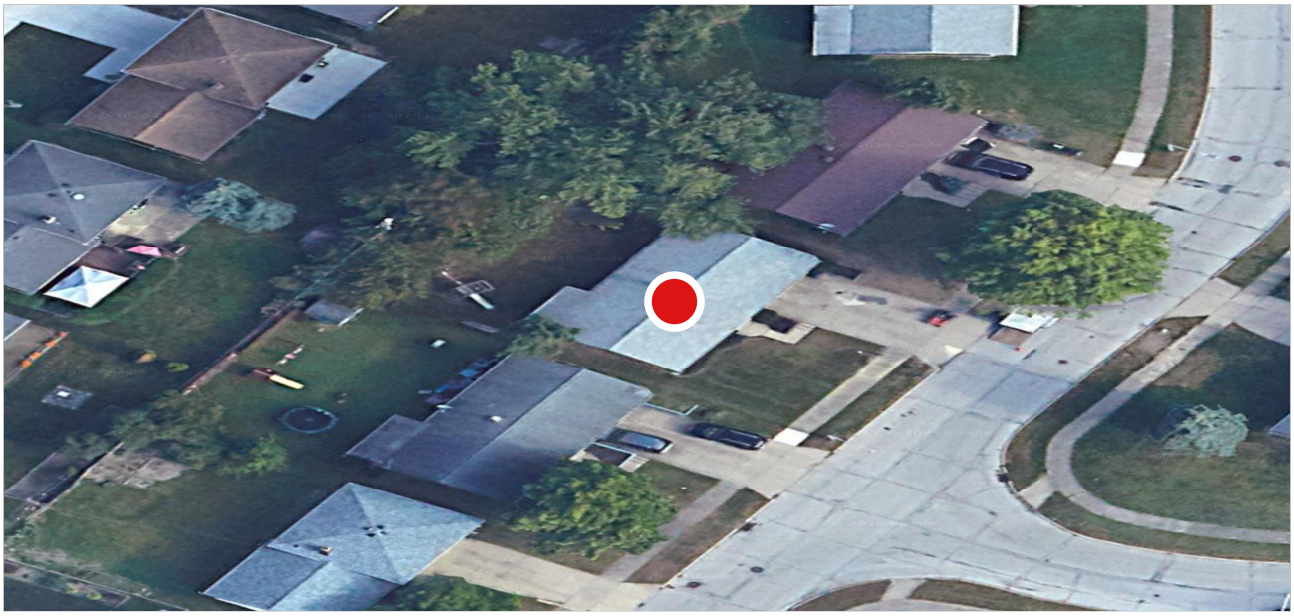


### Directional Aerial Views (N / S / E / W)

**North View**

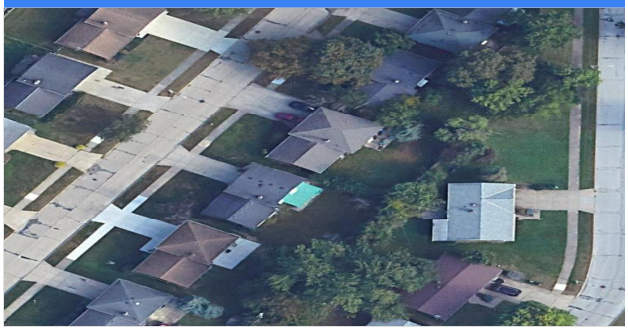

**South View**

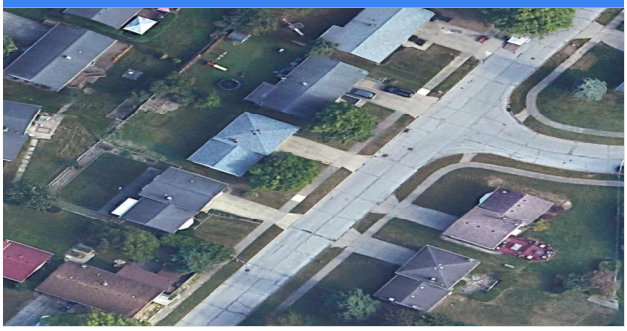

**East View**



**West View**



*Satellite imagery sourced from Google Maps. Used for reference only.*

## NOTE:

This price is only valid for 30 days from estimate date, and is based on a deposit of half down upon acceptance of estimate and the remaining half due upon completion of work.

The estimate is hereby based on seen, disclosed, or otherwise obvious damage. The repair of the covered loss may be higher than these figures because of other circumstances not yet discovered. Included in this estimate are the items that the Contractor believes necessary to return the property to pre loss condition.

Unseen, undisclosed, or otherwise not obvious conditions, if discovered later or during the course of repairs, will be considered not included.

If discovered, any necessary additional repairs will be submitted for supplemental coverage, based on current market pricing.

Terms & Conditions:

The following estimate is only an approximation of the damages suffered, or expenses incurred, by the insured. No warranty or representation with regard to the accuracy of the estimate is expressed or implied and none should be inferred. The actual damages suffered, or expenses incurred, could be higher or lower than the estimate, even significantly, depending on variances in a number of factors affecting the estimate and the accuracy of the information and assumptions upon which the estimate is based.

### Production Manager

Thank you for your business!