STAFF ONLY — NO PRICING
August 4, 2026

B

YICN Roofing

ROOF MEASUREMENT REPORT — 103 Wandle Ave, Bedford, OH 44146, USA


PROJECT SUMMARY

Total Facets	—
Predominant Pitch	**5/12**
Roof Type	**Cross Gable**
Net Squares	**16.31 SQ**
Net Area	**1,631 sqft**
Squares @ 12% Waste	**18.27 SQ**
Measurement Source	**Google Solar API**
Confidence	B **86%**

MEASUREMENT BREAKDOWN (LINEAR FEET)

Ridge	**98.0 LF**
Valley	**29.0 LF**
Rake	**74.0 LF**
Eave	**183.0 LF**
Sidewall Flashing	**21.0 LF**
Headwall / Apron	**13.0 LF**
Total Perimeter (Eave+Rake)	**257 LF**

SATELLITE VIEW

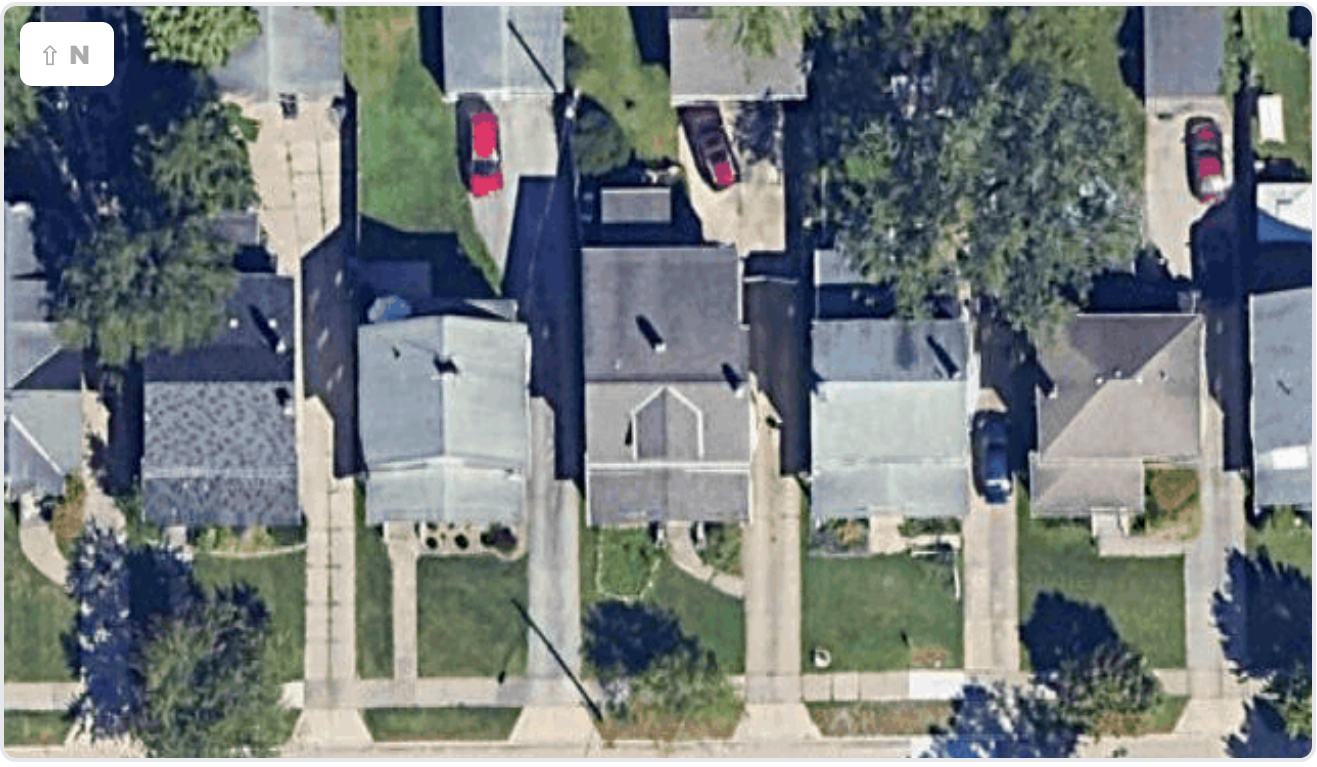

103 Wandle Ave, Bedford, OH 44146, USA — Google satellite imagery © 2026

8 segments → cross_gable roof detected. Area: segment_sum. Calibrated from past reports.

Directional Street Views

103 Wandle Ave, Bedford, OH 44146, USA

Street-level views to assess approach angle, gutter line, and obstructions. Click any photo to open in Google Maps.

NORTH (0°)



EAST (90°)



SOUTH (180°)



WEST (270°)



Waste Matrix & Linear Measurements

103 Wandle Ave, Bedford, OH 44146, USA

MEASUREMENT REPORT
Page 3 • August 4, 2026

WASTE CALCULATION — 1,631 SQFT BASE (HIGHLIGHTED = CURRENT 12% SETTING)

Measurement	0% sqft	0% SQ	7% sqft	7% SQ	10% sqft	10% SQ	12% sqft	12% SQ	14% sqft	14% SQ	17% sqft	17% SQ	22% sqft	22% SQ
Roof Area	1,631	16.3	1,745	17.4	1,794	17.9	**1,827**	**18.3**	1,859	18.6	1,908	19.1	1,990	19.9

LINEAR MEASUREMENTS

FEATURE	LENGTH (LF)	CONFIDENCE
Ridge	**98.0 LF**	63%
Hip	—	59%
Valley	**29.0 LF**	62%
Rake	**74.0 LF**	62%
Eave	**183.0 LF**	70%
Sidewall Flash.	**21.0 LF**	59%
Headwall / Apron	**13.0 LF**	—

QUICK REFERENCE

Predominant Pitch	**5/12**
Roof Type	**Cross Gable**
Segments	**0**
Confidence	B
Eave + Rake (perimeter)	**257 LF**
Hip + Ridge (cap/vent)	**98 LF**

8 segments → cross_gable roof detected. Area: segment_sum. Calibrated from past reports.

Steep-Slope Material Quantities

103 Wandle Ave, Bedford, OH 44146, USA

MEASUREMENT REPORT
Page 4 • August 4, 2026

Based on 16.31 SQ net area. Highlighted waste % = current setting (12%). All quantities rounded *up* to whole units. Verify with supplier before ordering.

Material	Unit	GAF Timberline HDZ				OC TruDef Duration				CertainTeed Landmark				Malarkey Vista AR			
		0%	7%	12%	17%	0%	7%	12%	17%	0%	7%	12%	17%	0%	7%	12%	17%
SHINGLES																	
Shingles	bundle	49	53	**55**	58	49	53	**55**	58	49	53	**55**	58	55	59	**61**	64
SYNTHETIC UNDERLAYMENT																	
Synthetic Underlayment (10 SQ/roll)	roll	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
ICE & WATER SHIELD																	
I&W 36" Perimeter (549 sqft)	roll	8	8	**8**	8	8	8	**8**	8	8	8	**8**	8	8	8	**8**	8
I&W 18" Valleys (275 sqft)	roll	4	4	**4**	4	4	4	**4**	4	4	4	**4**	4	4	4	**4**	4
ACCESSORIES (FIXED — NOT WASTE-SENSITIVE)																	
Starter Strip	bundle	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
Hip & Ridge Cap	bundle	3	3	**3**	3	3	3	**3**	3	3	3	**3**	3	3	3	**3**	3
Eave Drip Edge (10 ft)	piece	19	19	**19**	19	19	19	**19**	19	19	19	**19**	19	19	19	**19**	19
Rake Drip Edge (10 ft)	piece	8	8	**8**	8	8	8	**8**	8	8	8	**8**	8	8	8	**8**	8
Valley Metal / W-Valley (10 ft)	piece	3	3	**3**	3	3	3	**3**	3	3	3	**3**	3	3	3	**3**	3
Step Flashing 5×7	piece	84	84	**84**	84	84	84	**84**	84	84	84	**84**	84	84	84	**84**	84
Apron / Headwall Flashing (10 ft)	piece	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
Ridge Vent (4 ft sections)	piece	25	25	**25**	25	25	25	**25**	25	25	25	**25**	25	25	25	**25**	25
FASTENERS & SEALANTS																	
Coil Nails (50 lb box)	box	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
Plastic Cap Nails	box	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1
Roofing Caulk / Sealant	tube	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
Accessories (pipe boots, vents, etc.)	allow	—	—	**—**	—	—	—	**—**	—	—	—	**—**	—	—	—	**—**	—

Formulas: Shingles = SQ × bundles-per-SQ (GAF/OC/CertainTeed: 3 bpSQ; Malarkey: 3.33 bpSQ). I&W 36" = eave LF × 3 ft ÷ 75 sqft/roll. I&W 18" = eave LF × 1.5 ft ÷ 75 sqft/roll. Step flashing = sidewall LF × 4 pcs. Ridge vent = ridge LF ÷ 4 ft/pc. Verify with your supplier — coverage can vary by product line.

Estimate Material List

103 Wandle Ave, Bedford, OH 44146, USA

MEASUREMENT REPORT
Page 5 • August 4, 2026

24 line items from the active estimate at 12% waste. **STAFF USE ONLY — do not distribute to customer.**

#	Code	Description	Qty	Unit	Unit $	Total RCV
1	LAMINATED_COMP_SH	Laminate - comp. shingle roofing - per SQ	18.27	SQ	$273.00	$4,987.71
2	ROOFING_FELT	Roofing felt - synthetic underlayment - Standard grade	18.27	SQ	$45.48	$830.92
3	ICE__WATER_B	Ice & water barrier	748.16	SF	$2.02	$1,511.28
4	ASPHALT_STAR	Asphalt starter - universal starter course	287.84	LF	$2.18	$627.49
5	RR_DRIP_EDGE	R&R Drip edge	287.84	LF	$3.16	$909.57
6	RR_RIDGE_CAP	R&R Ridge cap - venting ridge cap shingles	109.76	LF	$12.59	$1,381.88
7	RR_VALLEY_W	R&R Valley "W" flashing	32.48	LF	$7.12	$231.26
8	RR_FLASHING_14	R&R Flashing, 14" wide	23.52	LF	$5.52	$129.83
9	REMOVE_3_TAB	Remove 3 tab - 25 yr. - comp. shingle roofing	18.27	SQ	$76.31	$1,394.18
10	RFG GTR	Gutter / downspout - aluminum - up to 5"	183	LF	$10.33	$1,890.39
11	DNSPOUT	Downspout - aluminum - 2" x 3"	6	EA	$45.00	$270.00
12	RR_FLASHING_PIPE_JACK	R&R Flashing - pipe jack	1	EA	$59.37	$59.37
13	RR_ROOF_VENT_TURTLE	R&R Roof vent - turtle type - Plastic	2	EA	$69.14	$138.28
14	SID REM	Remove siding, vinyl or aluminum	15.30	SQ	$45.00	$688.55
15	SID VS	Vinyl siding, standard grade	15.30	SQ	$425.00	$6,502.93
16	SID J	J-channel, vinyl (Top)	124	LF	$3.50	$434.00
17	SID J	J-channel, vinyl (Bottom)	124	LF	$3.50	$434.00
18	SID OC	Outside corner, vinyl	66	LF	$4.25	$280.50
19	SID SS	Starter strip, vinyl	124	LF	$2.50	$310.00
20	WP	House wrap / weather barrier	15.30	SQ	$55.00	$841.56
21	SID NAIL	Nails, 25-lb box (siding)	3	EA	$45.00	$135.00
22	CAULK	Caulk, exterior grade (tube)	3	EA	$8.00	$24.00
23	EL BOX	Electrical box extension (light box)	1	EA	$15.00	$15.00
24	SID WT	Water table / utility trim	124	LF	$2.50	$310.00
TOTAL						$24,337.69

YICN Roofing • Estimate Material List • 103 Wandle Ave, Bedford, OH 44146, USA • **STAFF USE ONLY**