CompanySync

ROOF MEASUREMENT REPORT — 13721 Martin Dr, Garfield Heights, OH 44125, USA

STAFF ONLY — NO PRICING

August 4, 2026

B


PROJECT SUMMARY

Total Facets	—
Predominant Pitch	**4/12**
Roof Type	**Gable**
Net Squares	**16.42 SQ**
Net Area	**1,641.703 sqft**
Squares @ 10% Waste	**18.06 SQ**
Measurement Source	**Google Solar API**
Confidence	B **86%**

MEASUREMENT BREAKDOWN (LINEAR FEET)

Ridge	**48.0 LF**
Rake	**68.0 LF**
Eave	**96.0 LF**
Sidewall Flashing	**7.0 LF**
Total Perimeter (Eave+Rake)	**164 LF**

SATELLITE VIEW

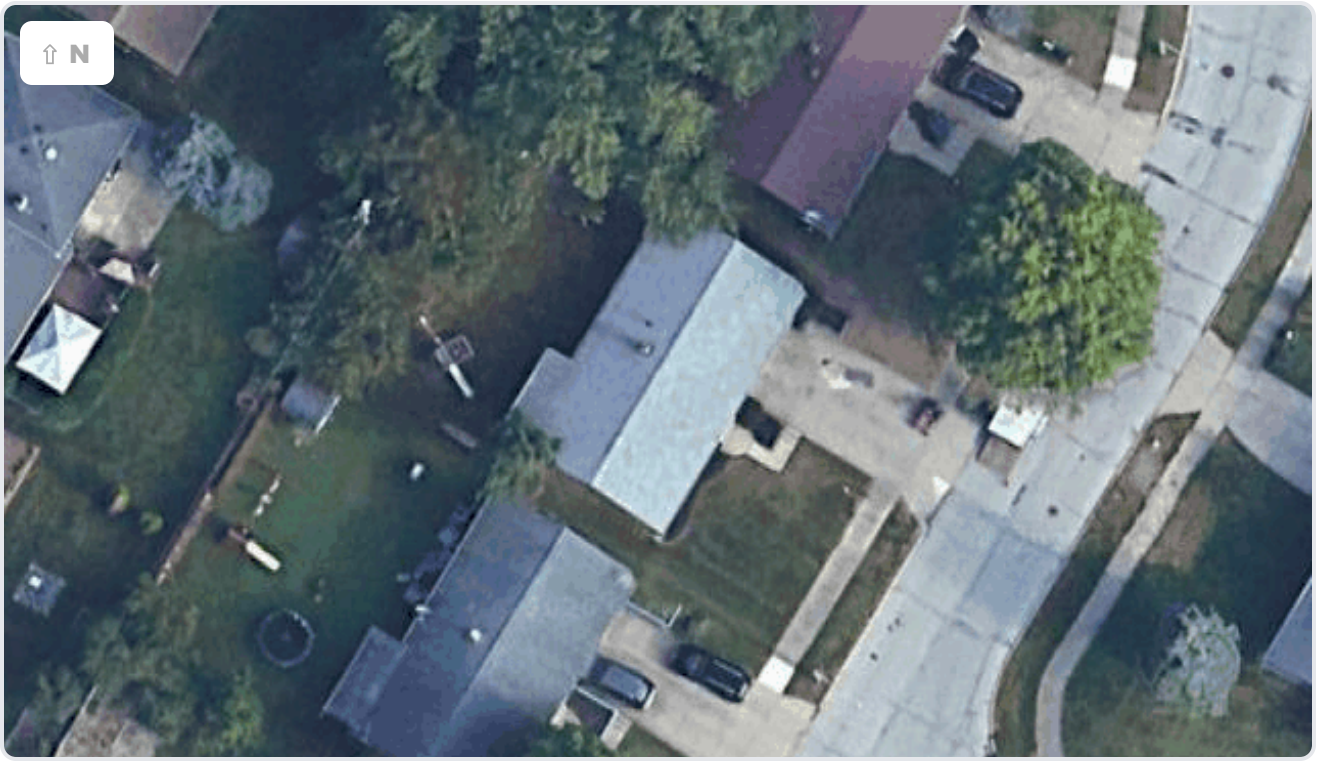

13721 Martin Dr, Garfield Heights, OH 44125, USA — Google satellite imagery © 2026

2 segments → gable roof detected. Area: segment_sum. No calibration data yet — upload EagleView/Hover reports to improve accuracy.

CompanySync • Measurement Report • August 4, 2026 • **STAFF USE ONLY — no pricing shown**

Directional Street Views

13721 Martin Dr, Garfield Heights, OH 44125, USA

Street-level views to assess approach angle, gutter line, and obstructions. Click any photo to open in Google Maps.

NORTH (0°)



EAST (90°)



SOUTH (180°)



WEST (270°)



Waste Matrix & Linear Measurements

13721 Martin Dr, Garfield Heights, OH 44125, USA

MEASUREMENT REPORT
Page 3 • August 4, 2026

WASTE CALCULATION — 1,641.703 SQFT BASE (HIGHLIGHTED = CURRENT 10% SETTING)

Measurement	0% sqft	0% SQ	7% sqft	7% SQ	10% sqft	10% SQ	12% sqft	12% SQ	14% sqft	14% SQ	17% sqft	17% SQ	22% sqft	22% SQ
Roof Area	1,642	16.4	1,757	17.6	**1,806**	**18.1**	1,839	18.4	1,872	18.7	1,921	19.2	2,003	20.0

LINEAR MEASUREMENTS

FEATURE	LENGTH (LF)	CONFIDENCE
Ridge	**48.0 LF**	76%
Hip	—	79%
Valley	—	72%
Rake	**68.0 LF**	76%
Eave	**96.0 LF**	73%
Sidewall Flash.	**7.0 LF**	61%
Headwall / Apron	—	—

QUICK REFERENCE

Predominant Pitch	**4/12**
Roof Type	**Gable**
Segments	**0**
Confidence	B
Eave + Rake (perimeter)	**164 LF**
Hip + Ridge (cap/vent)	**48 LF**

2 segments → gable roof detected. Area: segment_sum. No calibration data yet — upload EagleView/Hover reports to improve accuracy.

Steep-Slope Material Quantities

13721 Martin Dr, Garfield Heights, OH 44125, USA

MEASUREMENT REPORT
Page 4 • August 4, 2026

Based on 16.42 SQ net area. Highlighted waste % = current setting (10%). All quantities rounded *up* to whole units. Verify with supplier before ordering.

Material	Unit	GAF Timberline HDZ				OC TruDef Duration				CertainTeed Landmark				Malarkey Vista AR			
		0%	7%	12%	17%	0%	7%	12%	17%	0%	7%	12%	17%	0%	7%	12%	17%
SHINGLES																	
Shingles	bundle	50	53	56	58	50	53	56	58	50	53	56	58	55	59	62	64
SYNTHETIC UNDERLAYMENT																	
Synthetic Underlayment (10 SQ/roll)	roll	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
ICE & WATER SHIELD																	
I&W 36" Perimeter (288 sqft)	roll	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
I&W 18" Valleys (144 sqft)	roll	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
ACCESSORIES (FIXED — NOT WASTE-SENSITIVE)																	
Starter Strip	bundle	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Hip & Ridge Cap	bundle	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Eave Drip Edge (10 ft)	piece	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Rake Drip Edge (10 ft)	piece	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7
Valley Metal / W-Valley (10 ft)	piece	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Step Flashing 5×7	piece	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28
Apron / Headwall Flashing (10 ft)	piece	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Ridge Vent (4 ft sections)	piece	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
FASTENERS & SEALANTS																	
Coil Nails (50 lb box)	box	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Plastic Cap Nails	box	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Roofing Caulk / Sealant	tube	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Accessories (pipe boots, vents, etc.)	allow	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Formulas: Shingles = SQ × bundles-per-SQ (GAF/OC/CertainTeed: 3 bpSQ; Malarkey: 3.33 bpSQ). I&W 36" = eave LF × 3 ft ÷ 75 sqft/roll. I&W 18" = eave LF × 1.5 ft ÷ 75 sqft/roll. Step flashing = sidewall LF × 4 pcs. Ridge vent = ridge LF ÷ 4 ft/pc. Verify with your supplier — coverage can vary by product line.

Estimate Material List

13721 Martin Dr, Garfield Heights, OH 44125, USA

MEASUREMENT REPORT
Page 5 • August 4, 2026

12 line items from the active estimate at 10% waste. **STAFF USE ONLY — do not distribute to customer.**

#	Code	Description	Qty	Unit	Unit $	Total RCV
1	SID REM	Remove siding, vinyl or aluminum	24.24	SQ	$45.00	**$1,090.98**
2	SID VS	Vinyl siding, standard grade	24.24	SQ	$425.00	**$10,303.70**
3	SID J	J-channel, vinyl (Top)	160	LF	$3.50	**$560.00**
4	SID J	J-channel, vinyl (Bottom)	160	LF	$3.50	**$560.00**
5	SID OC	Outside corner, vinyl	60	LF	$4.25	**$255.00**
6	RFG STRT	Starter strips, vinyl (12 ft ea) — 160 LF ÷ 12	14	EA	$1.75	**$24.50**
7	WP	House wrap / weather barrier	24.24	SQ	$55.00	**$1,333.42**
8	SID NAIL	Nails, 25-lb box (siding)	5	EA	$45.00	**$225.00**
9	CAULK	Caulk, exterior grade (tube)	3	EA	$8.00	**$24.00**
10	EL BOX	Electrical box extension (light box)	1	EA	$15.00	**$15.00**
11	SID WB	Exterior water spigot / hose bib (cut-in & reconnect)	1	EA	$75.00	**$75.00**
12	RFG DUMP	Dumpster / Haul Away	1	EA	$350.00	**$350.00**
TOTAL						**$14,816.60**