STAFF ONLY — NO PRICING
August 4, 2026

B

YICN Roofing

ROOF MEASUREMENT REPORT — 20638 Centuryway Rd, Maple Heights, OH 44137, USA


PROJECT SUMMARY

Total Facets	—
Predominant Pitch	**6/12**
Roof Type	**Cross Gable**
Net Squares	**14.38 SQ**
Net Area	**1,438 sqft**
Squares @ 12% Waste	**16.11 SQ**
Measurement Source	**Google Solar API**
Confidence	B **86%**

MEASUREMENT BREAKDOWN (LINEAR FEET)

Ridge	**48.0 LF**
Valley	**19.0 LF**
Rake	**108.0 LF**
Eave	**89.0 LF**
Sidewall Flashing	**10.0 LF**
Headwall / Apron	**8.0 LF**
Total Perimeter (Eave+Rake)	**197 LF**

SATELLITE VIEW

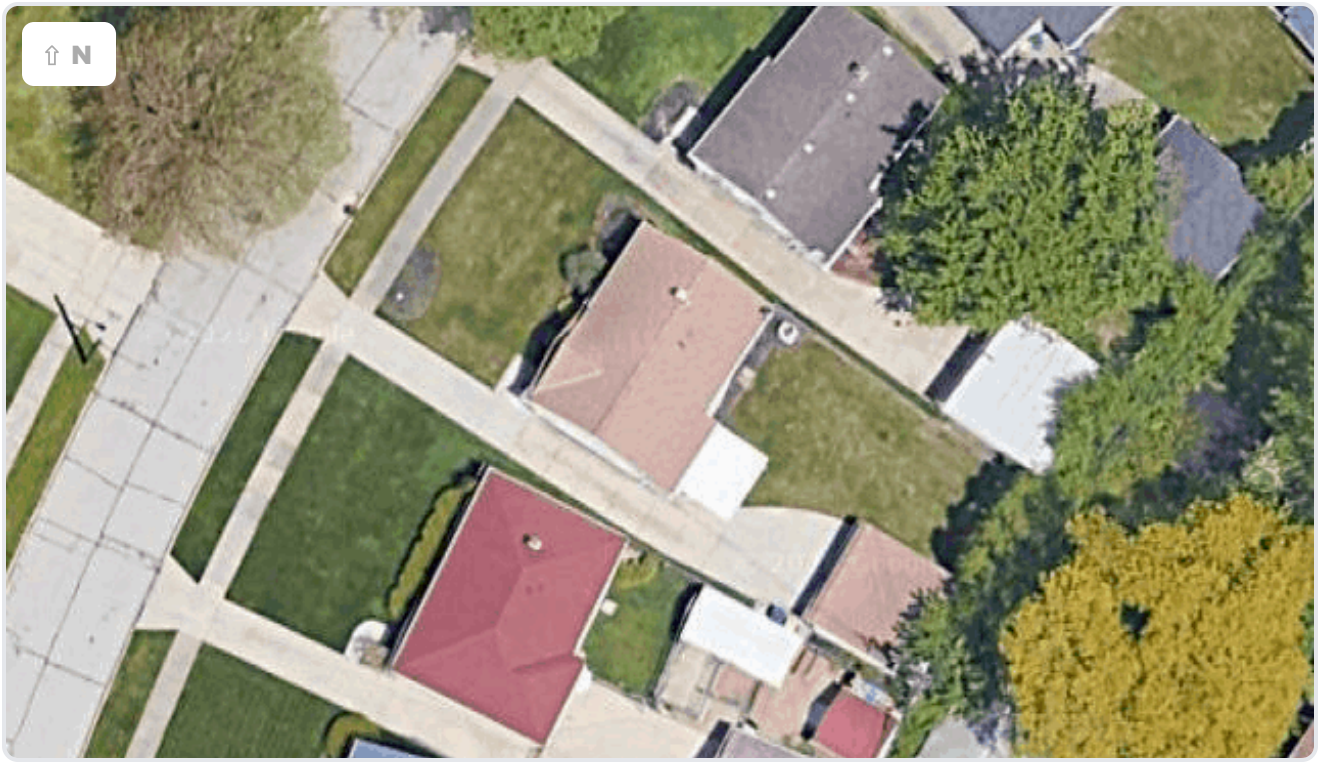

20638 Centuryway Rd, Maple Heights, OH 44137, USA — Google satellite imagery © 2026

5 segments → cross_gable roof detected. Area: segment_sum. Calibrated from past reports.

Directional Street Views

20638 Centuryway Rd, Maple Heights, OH 44137, USA

Street-level views to assess approach angle, gutter line, and obstructions. Click any photo to open in Google Maps.

NORTH (0°)



EAST (90°)



SOUTH (180°)



WEST (270°)



Waste Matrix & Linear Measurements

20638 Centuryway Rd, Maple Heights, OH 44137, USA

MEASUREMENT REPORT
Page 3 • August 4, 2026

WASTE CALCULATION — 1,438 SQFT BASE (HIGHLIGHTED = CURRENT 12% SETTING)

Measurement	0% sqft	0% SQ	7% sqft	7% SQ	10% sqft	10% SQ	12% sqft	12% SQ	14% sqft	14% SQ	17% sqft	17% SQ	22% sqft	22% SQ
Roof Area	1,438	14.4	1,539	15.4	1,582	15.8	**1,611**	**16.1**	1,639	16.4	1,682	16.8	1,754	17.5

LINEAR MEASUREMENTS

FEATURE	LENGTH (LF)	CONFIDENCE
Ridge	**48.0 LF**	63%
Hip	—	59%
Valley	**19.0 LF**	62%
Rake	**108.0 LF**	62%
Eave	**89.0 LF**	70%
Sidewall Flash.	**10.0 LF**	59%
Headwall / Apron	**8.0 LF**	—

QUICK REFERENCE

Predominant Pitch	**6/12**
Roof Type	**Cross Gable**
Segments	**0**
Confidence	B
Eave + Rake (perimeter)	**197 LF**
Hip + Ridge (cap/vent)	**48 LF**

5 segments → cross_gable roof detected. Area: segment_sum. Calibrated from past reports.

Steep-Slope Material Quantities

20638 Centuryway Rd, Maple Heights, OH 44137, USA

MEASUREMENT REPORT
Page 4 • August 4, 2026

Based on 14.38 SQ net area. Highlighted waste % = current setting (12%). All quantities rounded *up* to whole units. Verify with supplier before ordering.

Material	Unit	GAF Timberline HDZ				OC TruDef Duration				CertainTeed Landmark				Malarkey Vista AR			
		0%	7%	12%	17%	0%	7%	12%	17%	0%	7%	12%	17%	0%	7%	12%	17%
SHINGLES																	
Shingles	bundle	44	47	**49**	51	44	47	**49**	51	44	47	**49**	51	48	52	**54**	57
SYNTHETIC UNDERLAYMENT																	
Synthetic Underlayment (10 SQ/roll)	roll	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
ICE & WATER SHIELD																	
I&W 36" Perimeter (267 sqft)	roll	4	4	**4**	4	4	4	**4**	4	4	4	**4**	4	4	4	**4**	4
I&W 18" Valleys (134 sqft)	roll	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
ACCESSORIES (FIXED — NOT WASTE-SENSITIVE)																	
Starter Strip	bundle	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1
Hip & Ridge Cap	bundle	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
Eave Drip Edge (10 ft)	piece	9	9	**9**	9	9	9	**9**	9	9	9	**9**	9	9	9	**9**	9
Rake Drip Edge (10 ft)	piece	11	11	**11**	11	11	11	**11**	11	11	11	**11**	11	11	11	**11**	11
Valley Metal / W-Valley (10 ft)	piece	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
Step Flashing 5×7	piece	40	40	**40**	40	40	40	**40**	40	40	40	**40**	40	40	40	**40**	40
Apron / Headwall Flashing (10 ft)	piece	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1
Ridge Vent (4 ft sections)	piece	12	12	**12**	12	12	12	**12**	12	12	12	**12**	12	12	12	**12**	12
FASTENERS & SEALANTS																	
Coil Nails (50 lb box)	box	1	2	**2**	2	1	2	**2**	2	1	2	**2**	2	1	2	**2**	2
Plastic Cap Nails	box	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1	1	1	**1**	1
Roofing Caulk / Sealant	tube	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2	2	2	**2**	2
Accessories (pipe boots, vents, etc.)	allow	—	—	**—**	—	—	—	**—**	—	—	—	**—**	—	—	—	**—**	—

Formulas: Shingles = SQ × bundles-per-SQ (GAF/OC/CertainTeed: 3 bpSQ; Malarkey: 3.33 bpSQ). I&W 36" = eave LF × 3 ft ÷ 75 sqft/roll. I&W 18" = eave LF × 1.5 ft ÷ 75 sqft/roll. Step flashing = sidewall LF × 4 pcs. Ridge vent = ridge LF ÷ 4 ft/pc. Verify with your supplier — coverage can vary by product line.

Estimate Material List

20638 Centuryway Rd, Maple Heights, OH 44137, USA

MEASUREMENT REPORT
Page 5 • August 4, 2026

12 line items from the active estimate at 12% waste. **STAFF USE ONLY — do not distribute to customer.**

#	Code	Description	Qty	Unit	Unit $	Total RCV
1	SID REM	Remove siding, vinyl or aluminum	11.35	SQ	$45.00	**$510.84**
2	SID VS	Vinyl siding, standard grade	11.35	SQ	$425.00	**$4,824.60**
3	SID J	J-channel, vinyl (Top)	143	LF	$3.50	**$500.50**
4	SID J	J-channel, vinyl (Bottom)	143	LF	$3.50	**$500.50**
5	SID OC	Outside corner, vinyl	64	LF	$4.25	**$272.00**
6	SID SS	Starter strips, vinyl (12 ft ea) — 143 LF ÷ 12	12	EA	$8.50	**$102.00**
7	WP	House wrap / weather barrier	11.35	SQ	$55.00	**$624.36**
8	SID NAIL	Nails, 25-lb box (siding)	3	EA	$45.00	**$135.00**
9	CAULK	Caulk, exterior grade (tube)	3	EA	$8.00	**$24.00**
10	EL BOX	Electrical box extension (light box)	1	EA	$15.00	**$15.00**
11	SID WB	Exterior water spigot / hose bib (cut-in & reconnect)	1	EA	$75.00	**$75.00**
12	HAUL	Haul off / debris disposal	1	EA	$350.00	**$350.00**
TOTAL						**$7,933.80**