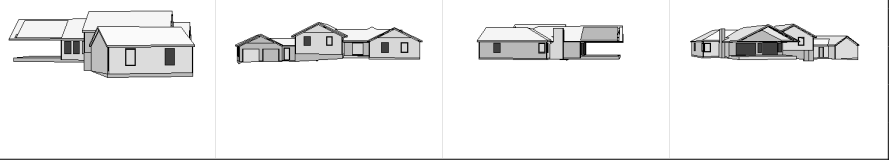
Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)						Claim #061300098, LORI SHAFER
Approved						
EXTERIOR PLAN: Exterior Plan						
Exterior Plan						
Exterior: 6,627.28 SF **Footprint:** 0.00 SF **Subtractions:** 490.44 SF **Building perimeter (ground):** 29.35 LF						
SIDING						
1 Tear Out - Siding, Lap, Vinyl, Good	2,857.00	$0.64	SF	$1,828.48	$0.00	$1,828.48
Debris Removal						
2 ~~Dumpster, 30 Yard~~	~~1~~	~~$672.53~~	~~EA~~	~~$672.53~~	~~$0.00~~	~~$672.53~~
Tax override applied - State applied to materials.						
Tax override applied - County applied to materials.						
Excluded labor from State calculation.						
Excluded equipment from State calculation.						
Excluded labor from County calculation.						
Excluded equipment from County calculation.						
3 Replace - Siding, Lap, Vinyl, Good	3,142.70	$3.36	SF	$10,559.47	$1,037.09 ✔	$9,522.38
Includes 10% waste on quantity.						
4 Tear Out - J-Channel Trim, Vinyl, Insulated	408.45	$0.56	LF	$228.73	$0.00	$228.73
5 Replace - J-Channel Trim, Vinyl, Insulated	428.87	$2.06	LF	$883.47	$119.66 ✔	$763.81
Includes 5% waste on quantity.						
6 Tear Out - Corner Trim, Vinyl, Inside, Non-Insulated	29.35	$0.88	LF	$25.83	$0.00	$25.83
7 Replace - Corner Trim, Vinyl, Inside, Non-Insulated	30.82	$3.96	LF	$122.04	$15.72 ✔	$106.32
Includes 5% waste on quantity.						
HVAC						
8 Tear Out - Wall Heater, Recessed, 750W	1	$24.72	EA	$24.72	$0.00	$24.72
9 Replace - Wall Heater, Recessed, 750W	1	$345.72	EA	$345.72	$160.72 ✔	$185.00
GUTTER & DOWNSPOUT						
10 Tear Out - Downspout, Aluminum, 2"x3"	72.00	$1.28	LF	$92.16	$0.00	$92.16
11 Replace - Downspout, Aluminum, 2"x3"	75.60	$8.99	LF	$679.65	$200.15 ✔	$479.50
Includes 5% waste on quantity.						
12 Rem/Reset - Meter Socket, 200-AMP, w/ Main Disconnect - SUPPLEMENT	1	$588.09	EA	$588.09	$0.00	$588.09
13 Rem/Reset - Mailbox, Wall-Mounted, Excellent - SUPPLEMENT	1	$36.96	EA	$36.96	$0.00	$36.96
14 Rem/Reset - Cable, Coaxial - SUPPLEMENT	30.15	$2.99	LF	$90.15	$0.00	$90.15
15 Rem/Reset - Light Fixture, Exterior, Dusk-to-Dawn, Good - SUPPLEMENT	1	$77.19	EA	$77.19	$0.00	$77.19
16 Rem/Reset - Shutters, Exterior, Wood, Louvered - SUPPLEMENT	6	$57.51	PR	$345.06	$0.00	$345.06


Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC) Approved					Claim #061300098, LORI SHAFER	
17 Rem/Reset - Window Box, Cedar - SUPPLEMENT	10.00	$20.34	LF	$203.40	$0.00	$203.40
Exterior Plan - Subtotal *(20 items)*				**$16,803.65**	**$1,533.34**	**$15,270.31**
Exterior Plan - Subtotal *(20 items)*				**$16,803.65**	**$1,533.34**	**$15,270.31**

ROOFPLAN: 21253591_lori_shafer.xml

Roof

Roof area: 5,021.35 SF **Squares:** 50.2 SQ **Soffit:** 879.45 SF
Eaves: 259.65 LF **Ridge:** 190.07 LF



SHINGLES

18	ITEL, Shingles, Laminated/Architectural, Tear Out	50.19	$73.76	SQ	$3,702.01	$0.00	$3,702.01
19	ITEL, Shingles, Laminated/Architectural, Good, Supply	53.20 (53.33)	$124.42	SQ	$6,635.32	$2,433.17	$4,202.15
	Includes 6% waste on quantity.						
	Materials quantity bundle rounding applied.						
	This line item includes a shingle material allowance per square, which reflects current market prices in your area. Market prices were verified by ITEL. The ITEL Asphalt Shingle Program allows you or your contractor of choice to have materials delivered directly to you. For more information on ordering shingles through ITEL, contact them at customerservice@itelinc.com or 800-890-4835.						
20	ITEL, Shingles, Laminated/Architectural, Good, Install	53.20	$155.06	SQ	$8,249.19	$160.36	$8,088.83
	Includes 6% waste on quantity.						
21	Replace - Shingles, Starter Row, Eave, Continuous	486.16	$2.18	LF	$1,059.83	$163.11	$896.72
	This item has been applied to the eaves+rakes of the roof.						
	Includes 6% waste on quantity.						
22	Replace - Ridge Cap Shingles, Laminated/Architectural	242.98	$6.51	LF	$1,581.80	$318.98	$1,262.82
	Includes 10% waste on quantity.						

UNDERLAYMENTS

23	Replace - Felt, Single Layer, 15 lb.	45.02	$36.32	SQ	$1,635.13	$223.84	$1,411.29
	Includes 5% waste on quantity.						
24	The quantity of felt has been reduced by the amount of ice and water shield used.						

VENTS AND FLASHINGS

25	Replace - Drip Edge, Eave/Rake, Aluminum, Mill Finished	481.57	$3.12	LF	$1,502.50	$272.81	$1,229.69
	Includes 5% waste on quantity.						
26	Replace - Flashing, Pipe Jack, Aluminum	1	$49.32	EA	$49.32	$9.42	$39.90
27	Rem/Reset - Satellite Dish, Mini - SUPPLEMENT	1	$143.06	EA	$143.06	$0.00	$143.06
28	Tear Out - Chimney Flue Cap, Metal, w/Spark Arrestor, 10" - SUPPLEMENT	1	$11.18	EA	$11.18	$0.00	$11.18
29	Replace - Chimney Flue Cap, Metal, w/Spark Arrestor, 10" - SUPPLEMENT	1	$200.53	EA	$200.53	$0.00	$200.53

Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC) Approved					Claim #061300098, LORI SHAFER	
Roof - Subtotal *(15 items)*				**$24,769.87**	**$3,581.69**	**$21,188.18**
21253591_lori_shafer.xml - Subtotal *(15 items)*				**$24,769.87**	**$3,581.69**	**$21,188.18**
Minimum Charge Adjustments						
30 Minimum Charge, Windows/Doors	1	$403.44	LS	$58.38	$0.00	$58.38
Minimum Charge Adjustments - Subtotal *(6 items)*				**$58.38**	**$0.00**	**$58.38**
Subtotal				**$41,631.90**	**$5,115.03**	**$36,516.87**

Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure (Your Insurance Claims Network, LLC) Claim #061300098, LORI SHAFER

Approved

Total Materials:	$14,429.20
Total Labor:	$27,202.70
Total Equipment:	$0.00
Total Market Conditions:	$0.00
Subtotal:	**$41,631.90**
State 5.750% (applies to materials only):	$829.67
County 1.000% (applies to materials only):	$144.29
Subtotal:	**$42,605.86**
Add 0.00% overhead:	$0.00
Add 0.00% profit:	$0.00
Replacement Cost Value:	**$42,605.86**
Replacement Cost on Coverage Building ($700,000.00 limit):	$42,605.86
Less Debris Removal	$(717.93)
Less Recoverable Depreciation:	$(5,115.03)
Net Actual Cash Value on Coverage Building:	**$36,772.90**
Estimate Total on Coverage Building:	**$36,772.90**
Recoverable Depreciation:	$5,115.03
Paid When Incurred: Debris Removal	$717.93
Net Coverage Building if Depreciation Is Recovered and Costs Are Incurred:	$42,605.86
Estimate Total on Coverage Building if Depreciation Is Recovered and Costs Are Incurred:	**$42,605.86**
Deductible ($2,500.00):	$(2,500.00)
Net Estimate:	**$34,272.90**
Total Net Recoverable Depreciation and Costs Incurred:	$5,832.96
Net Estimate if Depreciation Is Recovered and Costs Are Incurred:	**$40,105.86**

Finalization