State Farm
P.O. Box 106169
Atlanta, GA 30348-6169
Fax: 1-844-236-3646
statefarmfireclaims@statefarm.com

Structural Damage Claim Policy

This estimate is priced based on estimated market pricing for the cost of materials, labor, and other factors at the time of the loss.

Adjustments in market pricing and timing of the repairs may impact the final cost of covered repairs. Should you or the contractor you select have questions concerning our estimate, please contact us. If your contractor's estimate is higher than ours, you should contact us prior to beginning repairs. State Farm will work with you and your contractor to determine the actual and necessary cost of covered repairs at the time repairs will be completed, subject to policy terms, conditions and limits.

- We want you to receive quality repair work to restore the damages to your property.
- We will provide you with a detailed estimate of the scope of the damage and costs of repairs. Should the contractor you select have questions concerning our estimate, they should contact your claim representative directly.
- Depending upon the complexity of your repair, our estimate may or may not include an allowance for general contractor's overhead and profit. If you have questions regarding general contractor's overhead and profit and whether general contractor services are appropriate for your loss, please contact your claim representative before proceeding with repairs.
- There may be building codes, ordinances, laws, or regulations that affect the repairs of your property. These items may or may not be covered by your policy. Please contact your claim representative if you have any questions regarding coverage which may be available under your policy.
- State Farm® cannot authorize any contractor to proceed with work on your property. Repairs should proceed only with your authorization.
- State Farm does not guarantee the quality of the workmanship of any contractor or guarantee that the work will be accomplished within any specific time frame.
- It is understood that the contractor is hired by you, our insured, and that they work for you - not State Farm.

If you have any questions or need additional information regarding your claim, please contact your claim representative immediately.

Building Estimate Summary Guide

This summary guide is based on a sample estimate and is provided for reference only.
Please refer to the estimate for specifics of your claim.

State Farm Insurance

Insured:	Smith, Joe & Jane	Estimate:	00-0000-000
Property:	1 Main Street	Claim number:	00-0000-000
	Anywhere, IL 00000-0000	Policy Number:	00-00-0000-0
Type of Loss:	Other	Price List:	ILBL8F_MAR 13
Deductible:	$1,000.00		Restoration/Service/ Remodel F = Factored In, D = Do Not Apply

Summary for Dwelling

Line Item Total [1]			5,953.10
Material Sales Tax	@	10.000% x 1,520.00	
Subtotal			6,105.10
General Contractor Overhead [2]	@	10.0% x 6,105.10	610.51
General Contractor Profit	@	10.0% x 6,105.10	
Replacement Cost Value (Including General Contractor Overhead and Profit [3]			7,326.12
Less Depreciation (Including Taxes) [4]			(832.50)
Less General Contractor Overhead & Profit on Recoverable & Non - recoverable Depreciation			(166.50)
Less Deductible [5]			
Net Actual Cash Value Payment [6]			

Maximum Additional Amounts Available If Incurred:

Total Line Item Depreciation (Including Taxes) [4]	832.50	
Less Non - recoverable Depreciation (Including Taxes) [7]		
Subtotal		312.50
General Contractor O&P on Depreciation	166.50	
Less General Contractor O&P on Non - recoverable Depreciation		
Subtotal		
Total Maximum Additional Amounts Available If Incurred [8]		
Total Amount of Claim If Incurred [9]		

Claim Representative

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.

1. **Line Item Total –** Total value of all line items in the estimate plus possible adjustments for *labor minimums*. *Labor Minimum* is to cover a certain minimum number of hours for drive-time, set up time and applicable administrative costs and repairs.
2. **General Contractor's Overhead and Profit –** General contractor's charge for coordinating your repairs.
3. **Replacement Cost Value (RCV) –** Estimated cost to repair or replace damaged property.
4. **Depreciation –** The decrease in the value of property over a period of time due to wear, tear, condition, and obsolescence. A portion or all of this amount may be eligible for replacement cost benefits.
5. **Deductible –** The insurer will pay for losses, up to the policy limits, in excess of your applicable deductible.
6. **Net Actual Cash Value Payment (ACV) –** The repair or replacement cost of the damaged part of the property less *depreciation* and *deductible.*
7. **Non Recoverable Depreciation –** *Depreciation* applied to items that are not eligible for replacement cost benefits.
8. **Total Maximum Additional Amount if Incurred –** Total amount of recoverable depreciation after actual repair or replacement of the property.
9. **Total Amount of Claim if Incurred –** Total amount of the claim, including *net actual cash value payment and total maximum additional amount available if incurred.*

SAMPLE

State Farm

Insured:	SOLOMON, MARLENE	Estimate:	35-84X9-45F
Property:	12819 Hoy Ave Cleveland, OH 44105-6342	Claim Number:	3584X945F
		Policy Number:	95G1D7212
Home:	216-799-8530	Price List:	OHCL28_MAY25 Restoration/Service/Remodel
Cellular:	216-799-8530		
Type of Loss:	Hail		
Deductible:	$2,379.00		
Date of Loss:	5/2/2025		
Date Inspected:	6/4/2025		

Summary for Coverage A - Dwelling - 35 Windstorm and Hail

Line Item Total	32,686.41
Material Sales Tax	1,120.45
Replacement Cost Value	33,806.86
Less Depreciation (Including Taxes)	(10,079.09)
Less Deductible	(2,379.00)
Net Actual Cash Value Payment	$21,348.77

Maximum Additional Amounts Available If Incurred:

Total Line Item Depreciation (Including Taxes)	10,079.09		
Replacement Cost Benefits		10,079.09	
Total Maximum Additional Amount Available If Incurred			10,079.09
Total Amount of Claim If Incurred			$31,427.86

Parnell, Dana
866-787-8676 x 12519

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.

Any person who, with intent to defraud or knowing that he is facilitating a fraud against an insurer, submits an application or files a claim containing a false or deceptive statement is guilty of insurance fraud.

Explanation of Building Replacement Cost Benefits
RDP with Endorsement Policy
Coverage A - Dwelling - 35 Windstorm and Hail

To:	Name:	SOLOMON, MARLENE
	Address:	12819 Hoy Ave
	City:	Cleveland
	State/Zip:	OH, 44105-6342

Insured:	SOLOMON, MARLENE	Claim Number:	3584X945F
Date of Loss:	5/2/2025	Cause of Loss:	HAIL

Your insurance policy provides replacement cost benefits for some or all of the loss or damage to your dwelling or structures. Replacement cost benefits pays the actual and necessary cost of repair or replacement, without a deduction for depreciation, subject to your policy's limit of liability. To receive replacement cost benefits you must:

1. Complete the actual repair or replacement of the damaged part of the property within two years of the date of loss; and

2. Notify us within 30 days after the work has been completed.

3. Confirm completion of repair or replacement by submitting invoices, receipts, or other documentation to your agent or claim office.

Until these requirements have been satisfied, our payment(s) to you will be for the actual cash value of the damaged part of the property, which may include a deduction for depreciation.

Without waiving the above requirements, we will consider paying replacement cost benefits prior to actual repair or replacement if we determine repair or replacement costs will be incurred because repairs are substantially under way or you present a signed contract acceptable to us.

The estimate to repair or replace your damaged property is $33,806.86. The enclosed claim payment to you of $21,348.77 is for the actual cash value of the damaged property at the time of loss, less any deductible that may apply. We determined the actual cash value by deducting depreciation from the estimated repair or replacement cost. Our estimate details the depreciation applied to your loss. Based on our estimate, the additional amount available to you for replacement cost benefits (recoverable depreciation) is $10,079.09.

If you cannot have the repairs completed for the repair/replacement cost estimated, please contact your claim specialist prior to beginning repairs.

All policy provisions apply to your claim.

State Farm

SOLOMON, MARLENE 35-84X9-45F

Dwelling

Exterior



Dwelling Roof

1,321.54	Surface Area	13.22	Number of Squares
210.18	Total Perimeter Length	46.07	Total Ridge Length

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
++ ITEMS BELOW FOR FRONT, RIGHT AND LEFT SLOPES ONLY ++							
1. Tear off, haul and dispose of comp. shingles - Laminated							
	7.25 SQ	79.16	0.00	573.91			573.91
2. Asphalt starter - universal starter course							
	55.81 LF	2.17	2.86	123.97	15/20 yrs Avg.	(92.97) 75.00%	31.00
3. Laminated - comp. shingle rfg. - w/out felt							
	7.33 SQ	281.06	73.13	2,133.30	15/30 yrs Avg.	(1,066.66) 50.00%	1,066.64

The roof waste % is not available. The calculation contains values that may result in an inaccurate waste %.
Component RFG300 from this line item was priced by ITEL Asphalt Shingle Pricing (ASP) on 14 Jul 2025.
Auto Calculated Waste: 11.0%, 4.53SQ
Options: Valleys: Closed-cut (half laced), Include eave starter course: No, Include rake starter course: No, Exposure - Hip/Valley/Starter: 5 5/8",
Bundle Rounding: 0.1%, 0.04SQ - (included in waste calculation above)

4. Roofing felt - 15 lb.							
	3.40 SQ	41.08	2.24	141.91	15/20 yrs Avg.	(106.43) 75.00%	35.48
5. Ice & water barrier							
	385.99 SF	2.02	16.37	796.07	15/30 yrs Avg.	(398.04) 50.00%	398.03
6. Drip edge							
	139.18 LF	3.17	12.25	453.45	15/35 yrs Avg.	(194.34) 42.86%	259.11
7. Hip / Ridge cap - Standard profile - composition shingles							
	46.07 LF	6.98	11.72	333.29	15/30 yrs Avg.	(166.65) 50.00%	166.64
8. Chimney flashing - average (32" x 36")							
	1.00 EA	517.33	9.13	526.46	15/35 yrs Avg.	(225.62) 42.86%	300.84
9. Roof vent - turtle type - Metal							
	2.00 EA	79.44	3.90	162.78	15/35 yrs Avg.	(69.76) 42.86%	93.02
10. Flashing - pipe jack							
	1.00 EA	59.37	1.45	60.82	15/35 yrs Avg.	(26.06) 42.86%	34.76

CONTINUED - Dwelling Roof

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
11. Valley metal - (W) profile							
	27.00 LF	7.92	7.17	221.01	15/35 yrs Avg.	(94.72) 42.86%	126.29
12. Remove Additional charge for high roof (2 stories or greater)							
	4.87 SQ	7.17	0.00	34.92			34.92
13. Additional charge for high roof (2 stories or greater)							
	4.87 SQ	25.54	0.00	124.38			124.38
14. Remove Additional charge for steep roof - 10/12 - 12/12 slope							
	4.87 SQ	29.84	0.00	145.32			145.32
15. Additional charge for steep roof - 10/12 - 12/12 slope							
	4.87 SQ	90.88	0.00	442.59			442.59
++ ITEMS BELOW FOR REAR SLOPE ONLY ++							
16. Remove Laminated - comp. shingle rfg (per SHINGLE)							
	3.00 EA	8.93	0.00	26.79			26.79
- wind damaged shingles							
17. Laminated - comp. shingle rfg (per SHINGLE)							
	3.00 EA	20.58	0.68	62.42	15/30 yrs Avg.	(31.21) 50.00%	31.21

The roof waste % is not available. The calculation contains values that may result in an inaccurate waste %.
Component RFG300 from this line item was priced by ITEL Asphalt Shingle Pricing (ASP) on 14 Jul 2025.

Totals: Dwelling Roof			**140.90**	**6,363.39**	**2,472.46**	**3,890.93**

Front Elevation

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
18. R&R House wrap (air/moisture barrier)							
	493.70 SF	0.53	7.90	269.56	15/150 yrs Avg.	(26.95) 10.00%	242.61
19. R&R Siding - .019" metal							
	493.70 SF	9.94	206.56	5,113.94	15/50 yrs Avg.	(1,534.18) 30.00%	3,579.76
20. Prime & paint metal siding							
	493.70 SF	1.16	12.64	585.33	5/15 yrs Avg.	(195.11) 33.33%	390.22
Totals: Front Elevation			**227.10**	**5,968.83**		**1,756.24**	**4,212.59**

Right Elevation

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
21. R&R House wrap (air/moisture barrier)							
	815.00 SF	0.53	13.04	444.99	15/150 yrs Avg.	(44.50) 10.00%	400.49
22. R&R Siding - .019" metal							
	815.00 SF	9.94	341.00	8,442.10	15/50 yrs Avg.	(2,532.63) 30.00%	5,909.47
23. Prime & paint metal siding							
	815.00 SF	1.16	20.86	966.26	5/15 yrs Avg.	(322.08) 33.33%	644.18
24. Detach & Reset Gutter / downspout - aluminum - up to 5"							
	24.00 LF	6.37	0.00	152.88			152.88
25. Remove Meter base - 200 amp							
	1.00 EA	52.76	0.00	52.76			52.76
26. Install Meter base - 200 amp							
	1.00 EA	198.71	0.00	198.71			198.71
Totals: Right Elevation			**374.90**	**10,257.70**		**2,899.21**	**7,358.49**

Rear Elevation

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
No related storm damage observed							
Totals: Rear Elevation			**0.00**	**0.00**		**0.00**	**0.00**

Left Elevation

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV

CONTINUED - Left Elevation

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
27. R&R House wrap (air/moisture barrier)							
	805.00 SF	0.53	12.88	439.53	15/150 yrs Avg.	(43.96) 10.00%	395.57
28. R&R Siding - .019" metal							
	805.00 SF	9.94	336.81	8,338.51	15/50 yrs Avg.	(2,501.55) 30.00%	5,836.96
29. Prime & paint metal siding							
	805.00 SF	1.16	20.61	954.41	5/15 yrs Avg.	(318.14) 33.33%	636.27
30. Detach & Reset Gutter / downspout - aluminum - up to 5"							
	24.00 LF	6.37	0.00	152.88			152.88
31. R&R Fascia - metal - 6"							
	37.00 LF	7.69	7.25	291.78	15/50 yrs Avg.	(87.53) 30.00%	204.25
Totals: Left Elevation			**377.55**	**10,177.11**		**2,951.18**	**7,225.93**

Area Totals: Exterior

2,297.92 Exterior Wall Area
1,321.54 Surface Area 13.22 Number of Squares 210.18 Total Perimeter Length
46.07 Total Ridge Length

Total: Exterior	**1,120.45**	**32,767.03**	**10,079.09**	**22,687.94**

Debris Removal

0.00 SF Walls 0.00 SF Ceiling 0.00 SF Walls & Ceiling
0.00 SF Floor 0.00 SF Short Wall 0.00 LF Floor Perimeter
0.00 SF Long Wall 0.00 LF Ceil. Perimeter

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
32. Dumpster load - Approx. 40 yards, 7-8 tons of debris							
	1.00 EA	951.00	0.00	951.00			951.00
Totals: Debris Removal			**0.00**	**951.00**		**0.00**	**951.00**

Area Totals: Dwelling

2,297.92 Exterior Wall Area
1,321.54 Surface Area 13.22 Number of Squares 210.18 Total Perimeter Length
46.07 Total Ridge Length

Total: Dwelling	**1,120.45**	**33,718.03**	**10,079.09**	**23,638.94**

Labor Minimums Applied

	QUANTITY	UNIT PRICE	TAX	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
33. Gutter labor minimum							
	1.00 EA	88.83	0.00	88.83			88.83
Totals: Labor Minimums Applied			**0.00**	**88.83**		**0.00**	**88.83**
Line Item Totals: 35-84X9-45F			**1,120.45**	**33,806.86**		**10,079.09**	**23,727.77**

Grand Total Areas:

2,297.92 Exterior Wall Area

1,321.54 Surface Area
13.22 Number of Squares
210.18 Total Perimeter Length
46.07 Total Ridge Length

Recap of Taxes, Overhead and Profit

	GC Overhead (0%)	GC Profit (0%)	Material Tax (0%)	Material Sales Tax (8%)	Cln Matl Tax (8%)	Cln&Carpet Svc Tax (8%)
Line Items	0.00	0.00	0.00	1,120.45	0.00	0.00
Total	**0.00**	**0.00**	**0.00**	**1,120.45**	**0.00**	**0.00**

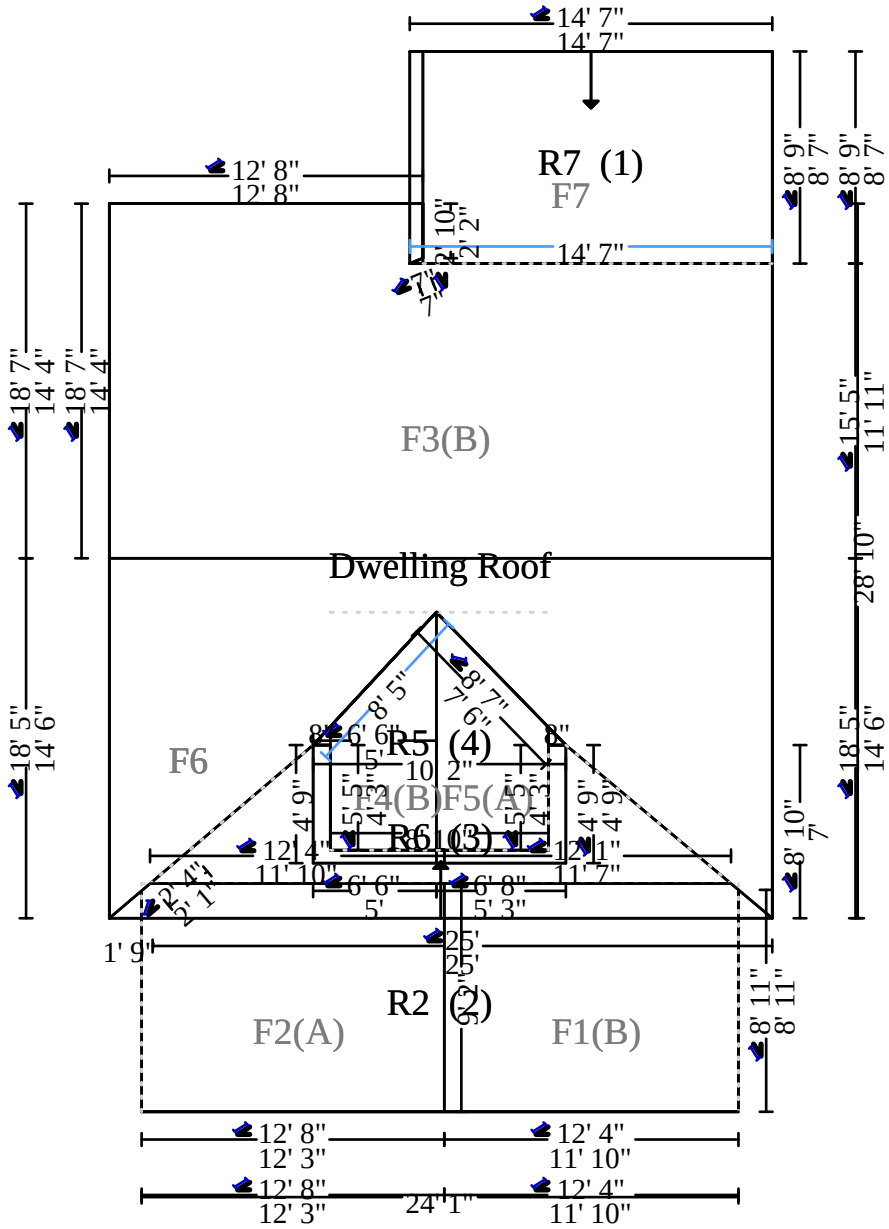
14' 7"
14' 7"
R7 (1)
F7
12' 8"
12' 8"
14' 7"
F3(B)
Dwelling Roof
F6
R5 (4)
F4(B)F5(A)
R6 (3)
R2 (2)
F2(A)
F1(B)
24' 1"

Exterior