
Dwelling

Roof Structure



Roof Surface

1,532.53	Surface Area	15.33	Number of Squares
209.87	Total Perimeter Length	49.91	Total Ridge Length

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
1. Tear off, haul and dispose of comp. shingles - 3 tab							
15.33 SQ	76.76	0.00	235.34	1,412.07			1,412.07
2. Ice & water barrier							
458.33 SF	2.02	19.80	189.12	1,134.75	13/30 yrs Avg.	(491.73) 43.33%	643.02
3. Roofing felt - 15 lb.							
10.75 SQ	41.11	7.09	89.80	538.82	13/20 yrs Avg.	(350.22) 65.00%	188.60
4. Drip edge							
209.87 LF	3.18	18.80	137.24	823.43	13/35 yrs Avg.	(305.85) 37.14%	517.58
5. Step flashing							
25.00 LF	12.69	4.44	64.34	386.03	13/35 yrs Avg.	(143.39) 37.14%	242.64
6. Counterflashing - Apron flashing							
5.00 LF	12.74	0.84	12.90	77.44	13/35 yrs Avg.	(28.77) 37.14%	48.67
7. Asphalt starter - universal starter course							
102.96 LF	2.20	5.35	46.38	278.24	13/20 yrs Avg.	(180.85) 65.00%	97.39
8. 3 tab - 25 yr. - comp. shingle roofing - w/out felt							
16.00 SQ	266.57	144.88	882.00	5,292.00	13/25 yrs Avg.	(2,751.84) 52.00%	2,540.16

Component RFG240 from this line item was priced by ITEL Asphalt Shingle Pricing (ASP) on 15 Jun 2026.
Auto Calculated Waste: 4.4%, 0.67SQ
Options: Valleys: Closed-cut (half laced), Include eave starter course: No, Include rake starter course: No, Include ridge/hip cap: No, Exposure - Hip/Valley/Starter: 5",
Bundle Rounding: 0.9%, 0.14SQ - (included in waste calculation above)

9. Hip / Ridge cap - cut from 3 tab - composition shingles							
49.91 LF	5.34	5.47	54.40	326.39	13/25 yrs Avg.	(169.71) 52.00%	156.68

Component RFG240 from this line item was priced by ITEL Asphalt Shingle Pricing (ASP) on 15 Jun 2026.

10. Roof vent - turtle type - Metal							
6.00 EA	79.50	11.70	97.74	586.44	13/35 yrs Avg.	(217.82) 37.14%	368.62

CONTINUED - Roof Surface

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
11. Flashing - pipe jack							
1.00 EA	60.06	1.50	12.32	73.88	13/35 yrs Avg.	(27.45) 37.14%	46.43
12. Flat roof exhaust vent / cap - gooseneck 8"							
1.00 EA	93.15	2.16	19.08	114.39	13/35 yrs Avg.	(42.48) 37.14%	71.91
13. Digital satellite system - Detach & reset							
2.00 EA	50.38	0.00	20.16	120.92			120.92
14. R&R Rain cap - 6"							
1.00 EA	79.19	3.95	16.64	99.78	13/25 yrs Avg.	(51.87) 52.00%	47.91
15. R&R Chimney flashing - small (24" x 24")							
1.00 EA	424.68	5.13	85.96	515.77	13/35 yrs Avg.	(191.59) 37.14%	324.18
16. R&R Flue cap							
1.00 EA	166.76	9.45	35.26	211.47	13/18 yrs Avg.	(152.73) 72.22%	58.74
17. Remove Additional charge for high roof (2 stories or greater)							
8.18 SQ	7.22	0.00	11.82	70.88			70.88
18. Additional charge for high roof (2 stories or greater)							
8.67 SQ	25.57	0.00	44.34	266.03			266.03
Totals: Roof Surface		**240.56**	**2,054.84**	**12,328.73**		**5,106.30**	**7,222.43**

Area Totals: Roof Structure

761.69 Exterior Wall Area
1,532.53 Surface Area 15.33 Number of Squares 209.87 Total Perimeter Length
49.91 Total Ridge Length

Total: Roof Structure		**240.56**	**2,054.84**	**12,328.73**		**5,106.30**	**7,222.43**

Exterior

Exterior

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
* 19. R&R Gutter - aluminum - up to 5"							
103.00 LF	11.28	37.16	239.80	1,438.80	10/25 yrs Avg.	(575.52) 40.00%	863.28
* 20. R&R downspout - aluminum - up to 5"							
48.00 LF	11.28	17.32	111.74	670.50	10/25 yrs Avg.	(268.19) 40.00%	402.31

CONTINUED - Exterior

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
Total: Exterior		**54.48**	**351.54**	**2,109.30**		**843.71**	**1,265.59**

Front Elevation

0.00 SF Walls 0.00 SF Ceiling 0.00 SF Walls & Ceiling
0.00 SF Floor 0.00 SF Short Wall 0.00 LF Floor Perimeter
0.00 SF Long Wall 0.00 LF Ceil. Perimeter

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
21. R&R Shutters - aluminum							
4.00 EA	336.07	69.02	282.66	1,695.96	10/30 yrs Avg.	(565.32) 33.33%	1,130.64
22. R&R Awning - Window/door - Aluminum or steel							
9.00 LF	100.57	43.28	189.70	1,138.11	10/40 yrs Avg.	(284.52) 25.00%	853.59
23. R&R Awning side panels - Alum./steel (PER SET)							
1.00 EA	91.36	2.82	18.82	113.00	10/40 yrs Avg.	(28.27) 25.00%	84.73
24. R&R Window screen, 10 - 16 SF							
8.00 EA	65.56	35.08	111.92	671.48	10/30 yrs Avg.	(223.84) 33.33%	447.64
Totals: Front Elevation		**150.20**	**603.10**	**3,618.55**		**1,101.95**	**2,516.60**

Rear Elevation

0.00 SF Walls 0.00 SF Ceiling 0.00 SF Walls & Ceiling
0.00 SF Floor 0.00 SF Short Wall 0.00 LF Floor Perimeter
0.00 SF Long Wall 0.00 LF Ceil. Perimeter

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
25. R&R Awning - Window/door - Aluminum or steel							
5.00 LF	100.57	24.04	105.38	632.27	10/40 yrs Avg.	(158.08) 25.00%	474.19
26. R&R Awning side panels - Alum./steel (PER SET)							
1.00 EA	91.36	2.82	18.82	113.00	10/40 yrs Avg.	(28.27) 25.00%	84.73

CONTINUED - Rear Elevation

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
27. R&R Wrap wood window frame & trim with aluminum sheet							
5.00 EA	338.44	28.73	344.20	2,065.13	10/50 yrs Avg.	(413.03) 20.00%	1,652.10
28. R&R Window screen, 10 - 16 SF							
8.00 EA	65.56	35.08	111.92	671.48	10/30 yrs Avg.	(223.84) 33.33%	447.64
29. Clean deck sheathing							
400.00 SF	0.40	15.72	32.06	207.78			207.78
30. Stain/finish deck							
400.00 SF	1.15	9.92	93.98	563.90	10/15 yrs Avg.	(375.94) 66.67%	187.96
31. Stain/finish deck handrail							
66.00 LF	8.62	9.93	115.76	694.61	10/15 yrs Avg.	(463.08) 66.67%	231.53
Totals: Rear Elevation		**126.24**	**822.12**	**4,948.17**		**1,662.24**	**3,285.93**

Area Totals: Exterior

Total: Exterior		**330.92**	**1,776.76**	**10,676.02**		**3,607.90**	**7,068.12**

Area Totals: Dwelling

761.69 Exterior Wall Area
1,532.53 Surface Area
15.33 Number of Squares
209.87 Total Perimeter Length
49.91 Total Ridge Length

Total: Dwelling		**571.48**	**3,831.60**	**23,004.75**		**8,714.20**	**14,290.55**

Debris Removal

0.00 SF Walls
0.00 SF Ceiling
0.00 SF Walls & Ceiling
0.00 SF Floor
0.00 SF Short Wall
0.00 LF Floor Perimeter
0.00 SF Long Wall
0.00 LF Ceil. Perimeter

QUANTITY	UNIT PRICE	TAX	GCO&P	RCV	AGE/LIFE CONDITION	DEPREC. DEP %	ACV
32. Haul debris - per pickup truck load - including dump fees							
1.00 EA	198.31	0.00	39.66	237.97			237.97
Totals: Debris Removal		**0.00**	**39.66**	**237.97**		**0.00**	**237.97**
Line Item Totals: 35-0D9P-754		**571.48**	**3,871.26**	**23,242.72**		**8,714.20**	**14,528.52**


Grand Total Areas:

761.69 Exterior Wall Area

1,532.53 Surface Area
15.33 Number of Squares
209.87 Total Perimeter Length
49.91 Total Ridge Length

Recap of Taxes, Overhead and Profit

	GC Overhead (10%)	GC Profit (10%)	Material Tax (0%)	Material Sales Tax (8%)	Cln Matl Tax (8%)	Cln&Carpet Svc Tax (8%)
Line Items	1,935.63	1,935.63	0.00	555.76	0.32	15.40
Total	**1,935.63**	**1,935.63**	**0.00**	**555.76**	**0.32**	**15.40**

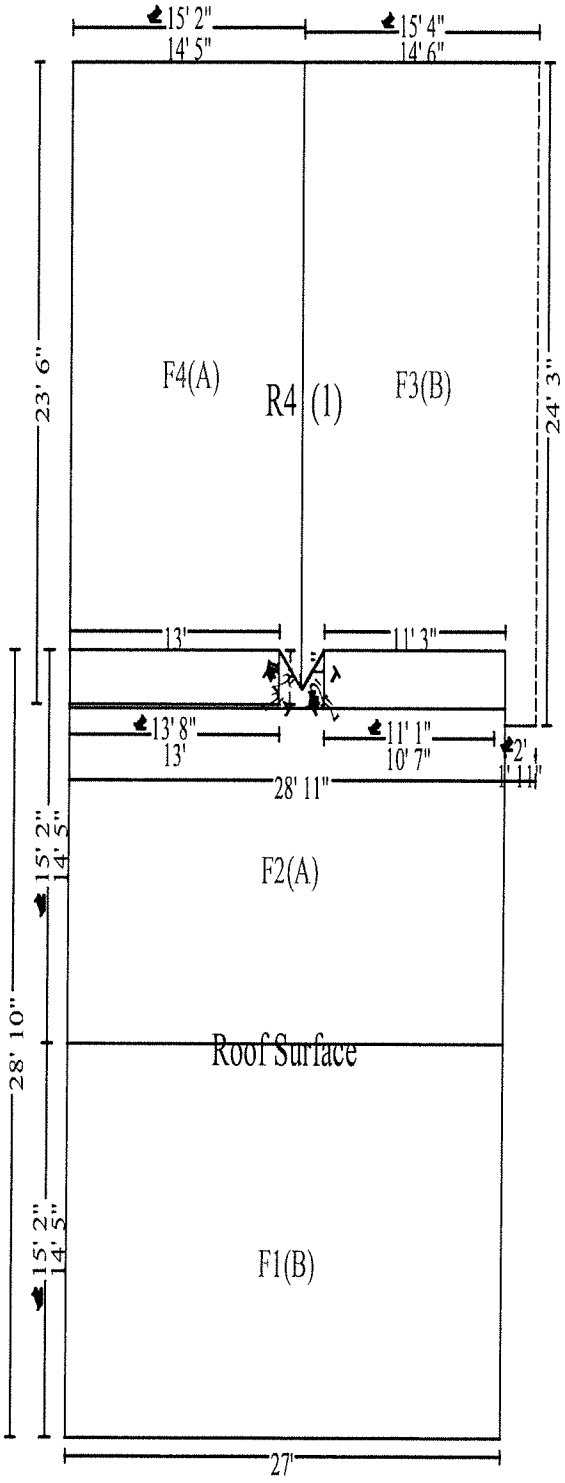

Roof Structure