ESTIMATE

EST-1957 (AI)

YICN Roofing
675 Alpha Dr
Highland Heights, OH 44143
216-777-7154
yicnteam@gmail.com

To

Customer

5420 Mardale Ave, Bedford Heights, OH 44146, USA

Estimate Date: 7/27/2026

#	Description	Qty	Unit	Rate	Amount
1	Laminate - comp. shingle roofing - per SQ	32.89	SQ	$273.00	$8978.97
2	Roofing felt -	32.89	SQ	$41.18	$1354.41
3	Ice & water barrier	930.72	SF	$2.02	$1880.05
4	Asphalt starter - universal starter course	265.44	LF	$2.18	$578.66
5	R&R Drip edge	265.44	LF	$3.16	$838.79
6	R&R Ridge cap - venting ridge cap shingles	11.20	LF	$12.59	$141.01
7	R&R Ridge cap - venting ridge cap shingles	181.44	LF	$12.59	$2284.33
8	R&R Valley "W" flashing	24.64	LF	$7.12	$175.44
9	R&R Flashing, 14" wide	24.64	LF	$5.52	$136.01
10	Remove 3 tab - 25 yr. - comp. shingle roofing	32.89	SQ	$76.31	$2509.84

Thank you for your business!

11	R&R Flashing - pipe jack	1	EA	$59.37	$59.37
12	R&R Roof vent - active ventilation	2	EA	$147.59	$295.18

SUBTOTAL:	**$19232.06**
TOTAL (RCV):	**$19232.06**

Thank you for your business!

ROOF MEASUREMENT SUMMARY

5420 Mardale Ave, Bedford Heights, OH 44146, USA

ROOF AREA	ORDER QTY	PITCH	CONFIDENCE
29.4 SQ	**32.9 SQ**	**4/12**	**A**
2,937.264 sq ft	+12% waste	complex hip	83%

LINEAR MEASUREMENTS	Length	Confidence
Ridge	**10.0 LF**	66%
Hip	**162.0 LF**	61%
Valley	**22.0 LF**	65%
Rake	**0 LF**	65%
Eave	**237.0 LF**	73%
Step Flashing	**22.0 LF**	61%

WASTE CALCULATION — 2,937.264 sq ft base


Waste %	5%	10%	**12%**	15%	17%	20%
Area (sqft)	3,084	3,231	**3,290**	3,378	3,437	3,525
Squares	30.8	32.3	**32.9**	33.8	34.4	35.3

5 segments !' complex_hip roof detected. Area: segment_sum. Calibrated from past reports.

PROPERTY PHOTOS


5420 Mardale Ave, Bedford Heights, OH 44146, USA

Aerial View — Satellite Imagery

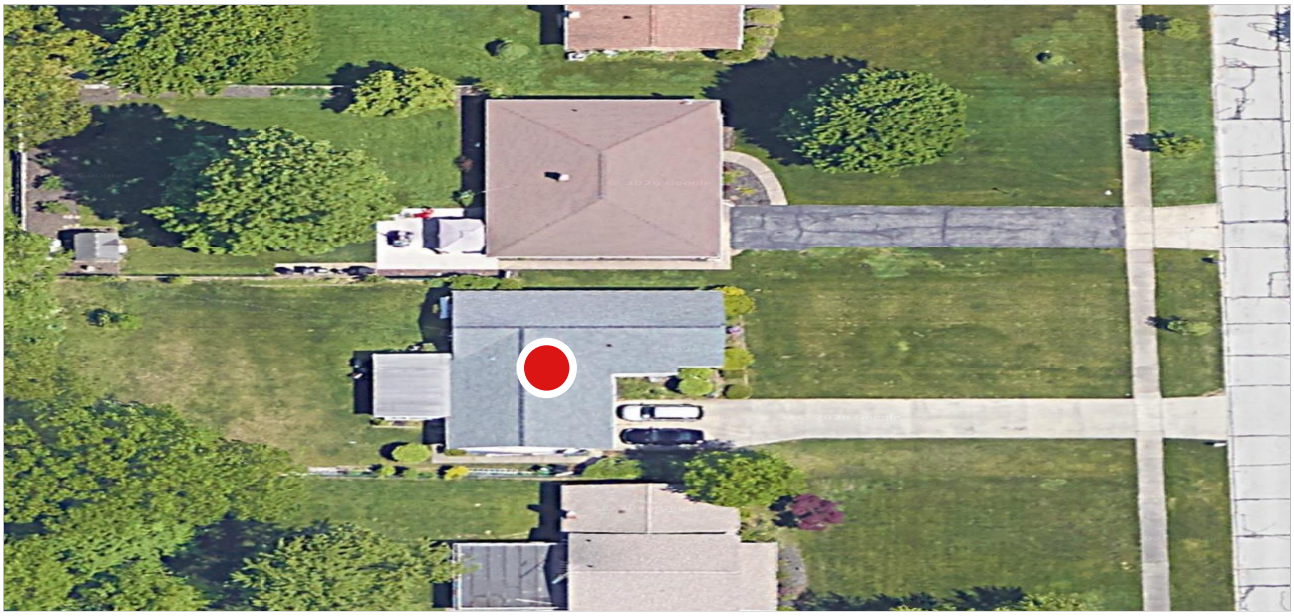


Directional Aerial Views (N / S / E / W)


North View

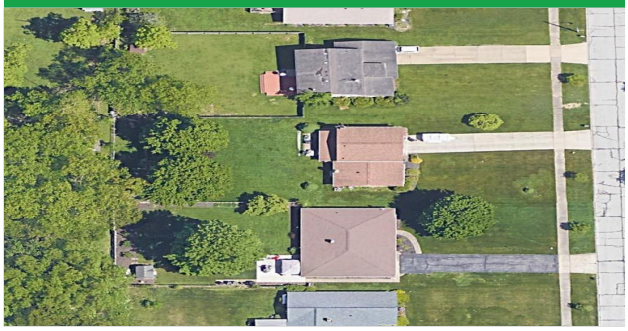


South View

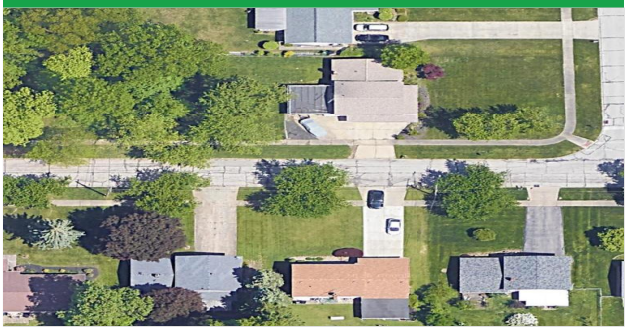

East View

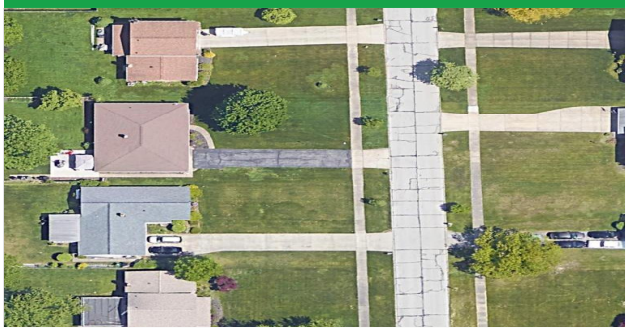

West View

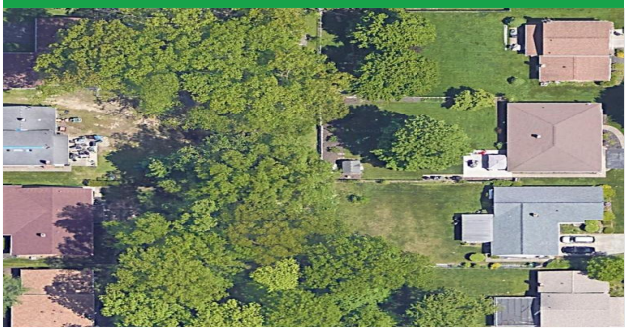

Satellite imagery sourced from Google Maps. Used for reference only.

NOTE:

This price is only valid for 30 days from estimate date, and is based on a deposit of half down upon acceptance of estimate and the remaining half due upon completion of work.

The estimate is hereby based on seen, disclosed, or otherwise obvious damage. The repair of the covered loss may be higher than these figures because of other circumstances not yet discovered. Included in this estimate are the items that the Contractor believes necessary to return the property to pre loss condition.

Unseen, undisclosed, or otherwise not obvious conditions, if discovered later or during the course of repairs, will be considered not included.

If discovered, any necessary additional repairs will be submitted for supplemental coverage, based on current market pricing.

Terms & Conditions:

The following estimate is only an approximation of the damages suffered, or expenses incurred, by the insured. No warranty or representation with regard to the accuracy of the estimate is expressed or implied and none should be inferred. The actual damages suffered, or expenses incurred, could be higher or lower than the estimate, even significantly, depending on variances in a number of factors affecting the estimate and the accuracy of the information and assumptions upon which the estimate is based.

Warranty & Additional Terms:

1. Coverage Period
YICN Roofing (the "Contractor") warrants to the original Property Owner that the roofing system installed will be free from defects in workmanship for a period of ten (10) years from the date of substantial completion.

2. Scope of Warranty
This warranty covers leaks or structural failures directly resulting from errors in the installation process, including:

Improper fastening of shingles or underlayment.

Incorrect installation of flashing (chimneys, valleys, pipe boots).

Failure to adhere to manufacturer-specified installation patterns.

3. Remedy
If a workmanship defect is identified during the 10-year period, the Contractor will provide the labor and materials necessary to repair the specific affected area at no cost to the Property Owner.

4. Exclusions
This warranty specifically excludes damage caused by:

Acts of God: Hail, winds exceeding manufacturer ratings, lightning, or fallen trees.

Existing Structures: Movement or settling of the building's foundation or roof deck.

Third-Party Alterations: Modifications made by other contractors (e.g., satellite dish installation, solar panels, or gutter repairs).

Lack of Maintenance: Failure by the owner to keep the roof free of debris or ice dams.

Material Defects: Failures in the shingles or products themselves (which are covered by the Manufacturer’s Warranty).

5. Transferability
This warranty is non-transferable unless otherwise agreed upon in writing at the time of title transfer. A one-time transfer may be permitted within the first two (2) years of the warranty period, subject to a professional inspection by the Contractor.

6. Claim Procedure
To report a claim, the Property Owner must notify the Contractor within 48 hours of discovering the leak or defect. Failure to provide timely notice that results in additional interior damage may void the labor coverage for those consequential damages.

Production Manager

675 Alpha Dr
Highland Heights, OH 44143

Thank you for your business!