YICN Roofing
216-777-7154
yicnteam@gmail.com
675 Alpha Dr

ESTIMATE

EST-2108 (AI)

October 13, 2026

PREPARED FOR

WILLIAM O FOSTER & ANNIE L FOSTER

14404 WHEELER RD, MAPLE HEIGHTS, OH 44137-4033

PREPARED BY

YICN Roofing

Date: 10/13/2026
216-777-7154
yicnteam@gmail.com
Claim #: 000-00-174348
Adjuster: Ryan Arce

#	Description	Qty	Unit	Rate	Amount
1	Tear off, haul and dispose of comp. shingles - Laminated	14.84	SQ	$80.44	$1193.73
2	Add. layer of comp. shingles, remove & disp. - 3 tab	14.84	SQ	$49.43	$733.54
3	Laminated - comp. shingle rfg. - w/out felt	17.33	SQ	$295.83	$5319.00
4	Asphalt starter - universal starter course (Code Upgrade)	152	LF	$2.20	$342.18
5	Drip edge (Code Upgrade)	152	LF	$3.19	$498.50
6	Ice & water barrier (Code Upgrade)	912	SF	$2.03	$1890.76
7	Roofing felt - 15 lb.	5.72	SQ	$41.24	$239.66
8	Chimney flashing - small (24" x 24")	1	EA	$409.07	$414.21
9	Flashing - pipe jack	2	EA	$60.22	$123.43
10	Roof vent - turtle type - Metal	2	EA	$80.33	$164.66


#	Description	Qty	Unit	Rate	Amount
11	Hip / Ridge cap - Standard profile - composition shingles	104.99	LF	$7.01	$762.69
12	R&R Gutter guard/screen (House)	152	LF	$5.47	$850.29
13	Tear off, haul & disp. comp. shingles - Laminated	5.64	SQ	$80.44	$453.68
14	Add. layer comp shingles, remove & disp. - 3 tab	5.64	SQ	$49.43	$278.79
15	Laminated - comp. shingle rfg. - w/out felt	6.67	SQ	$295.83	$2047.19
16	Roofing felt - 15 lb.	5.64	SQ	$41.24	$236.31
17	Hip / Ridge cap - standard profile	66.26	LF	$7.01	$481.34
18	R&R Roof vent - turtle type - Metal	1	EA	$92.78	$94.78
19	R&R Gutter guard/screen	92.67	LF	$5.47	$518.39
20	Grill Cover* (Weber Spirit & Spirit II Black Cover - Ace Hardware)	1	EA	$79.99	$79.99

SUBTOTAL: **$16723.12**

TOTAL: **$16723.12**

NEXT STEP Contact us to review this estimate and discuss approval or scheduling.

Aerial View — Satellite Imagery

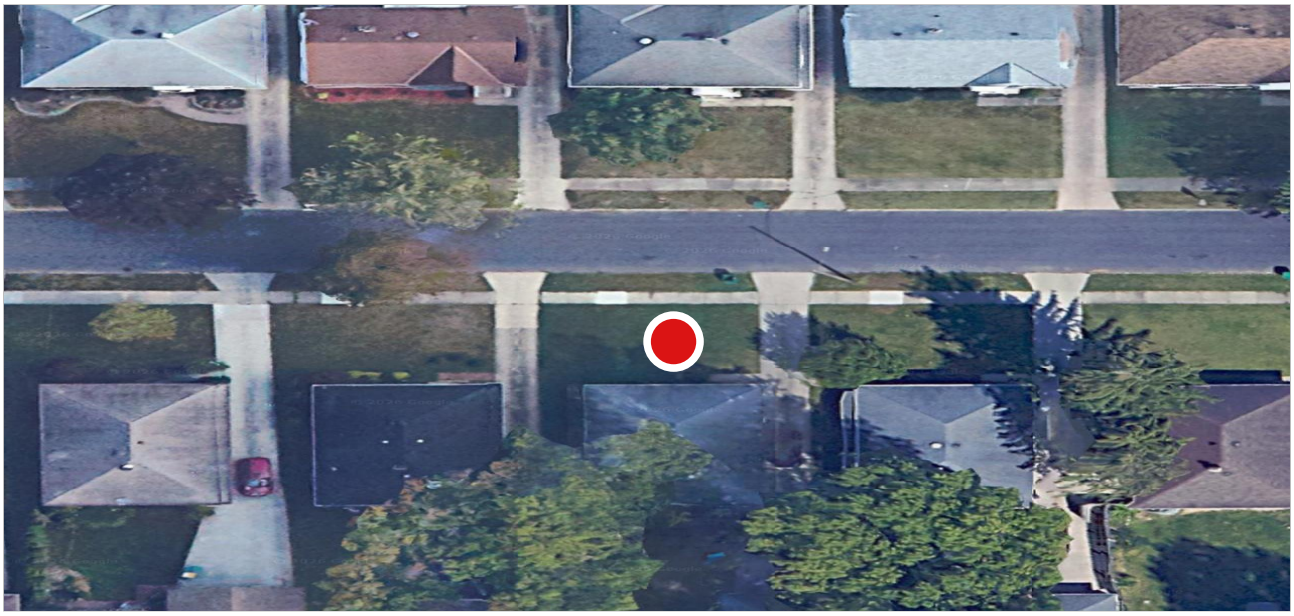


Directional Aerial Views (N / S / E / W)


North View




South View

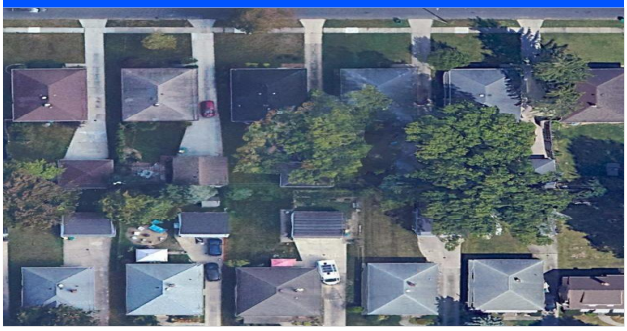

East View

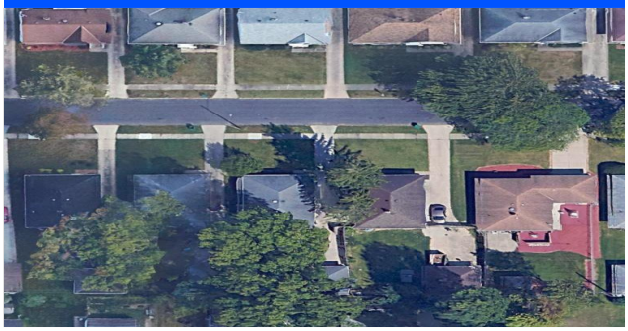

West View

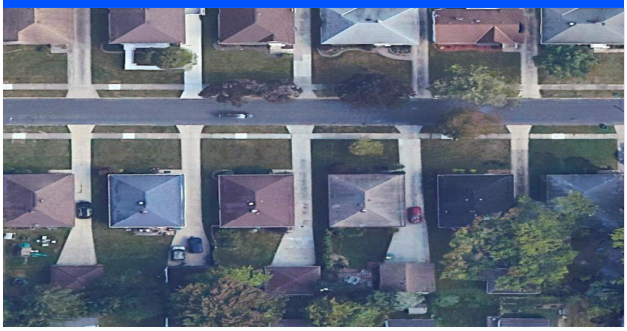

Satellite imagery sourced from Google Maps. Used for reference only.

NOTE:

This price is only valid for 30 days from estimate date, and is based on a deposit of half down upon acceptance of estimate and the remaining half due upon completion of work.

The estimate is hereby based on seen, disclosed, or otherwise obvious damage. The repair of the covered loss may be higher than these figures because of other circumstances not yet discovered. Included in this estimate are the items that the Contractor believes necessary to return the property to pre loss condition.

Unseen, undisclosed, or otherwise not obvious conditions, if discovered later or during the course of repairs, will be considered not included.

If discovered, any necessary additional repairs will be submitted for supplemental coverage, based on current market pricing.

Terms & Conditions:

The following estimate is only an approximation of the damages suffered, or expenses incurred, by the insured. No warranty or representation with regard to the accuracy of the estimate is expressed or implied and none should be inferred. The actual damages suffered, or expenses incurred, could be higher or lower than the estimate, even significantly, depending on variances in a number of factors affecting the estimate and the accuracy of the information and assumptions upon which the estimate is based.

Warranty & Additional Terms:

1. Coverage Period
YICN Roofing (the "Contractor") warrants to the original Property Owner that the roofing system installed will be free from defects in workmanship for a period of ten (10) years from the date of substantial completion.

2. Scope of Warranty
This warranty covers leaks or structural failures directly resulting from errors in the installation process, including:

Improper fastening of shingles or underlayment.

Incorrect installation of flashing (chimneys, valleys, pipe boots).

Failure to adhere to manufacturer-specified installation patterns.

3. Remedy
If a workmanship defect is identified during the 10-year period, the Contractor will provide the labor and materials necessary to repair the specific affected area at no cost to the Property Owner.

4. Exclusions
This warranty specifically excludes damage caused by:

Acts of God: Hail, winds exceeding manufacturer ratings, lightning, or fallen trees.

Existing Structures: Movement or settling of the building's foundation or roof deck.

Third-Party Alterations: Modifications made by other contractors (e.g., satellite dish installation, solar panels, or gutter repairs).

Lack of Maintenance: Failure by the owner to keep the roof free of debris or ice dams.

Material Defects: Failures in the shingles or products themselves (which are covered by the Manufacturer’s Warranty).

5. Transferability
This warranty is non-transferable unless otherwise agreed upon in writing at the time of title transfer. A one-time transfer may be permitted within the first two (2) years of the warranty period, subject to a professional inspection by the Contractor.

6. Claim Procedure
To report a claim, the Property Owner must notify the Contractor within 48 hours of discovering the leak or defect. Failure to provide timely notice that results in additional interior damage may void the labor coverage for those consequential damages.

Production Manager

675 Alpha Dr
Highland Heights, OH 44143

Thank you for your business!