YICN Roofing

216-777-7154
yicnteam@gmail.com

ESTIMATE

EST-36 (AI)

To

Customer

111 Wandle Ave, Bedford, OH 44146, USA

Estimate Date: 7/27/2026

#	Description	Qty	Unit	Rate	RCV	ACV
1	Laminate - comp. shingle roofing - per SQ	12.31	SQ	$273.00	$3360.63	$3360.63
2	Roofing felt -	12.31	SQ	$47.58	$585.71	$585.71
3	Ice & water barrier	573.44	SF	$2.02	$1158.35	$1158.35
4	course	201	LF	$5.00	$1005.00	$1005.00
5	R&R Drip edge	225.12	LF	$3.16	$711.38	$711.38
6	R&R Ridge cap - venting ridge cap shingles	78.40	LF	$12.59	$987.06	$987.06
7	R&R Valley "W" flashing	23.52	LF	$7.12	$167.46	$167.46
8	R&R Flashing, 14" wide	17.92	LF	$5.52	$98.92	$98.92
9	Remove 3 tab - 25 yr. - comp. shingle roofing	12.31	SQ	$76.31	$939.38	$939.38
10	R&R Flashing - pipe jack -	1	EA	$102.17	$102.17	$102.17

Thank you for your business!

11	-	2	EA	$3.00	$6.00	$6.00
12	split-fire resist-per ind mat source	10.99	SQ	$473.51	$5203.87	$5203.87

SUBTOTAL:	**$14325.93**
TOTAL (RCV):	**$14325.93**

Thank you for your business!

ROOF MEASUREMENT SUMMARY

111 Wandle Ave, Bedford, OH 44146, USA

ROOF AREA	ORDER QTY	PITCH	CONFIDENCE
11.0 SQ	**12.3 SQ**	**7/12**	**A**
1,099.214 sq ft	+12% waste	cross gable	84%

LINEAR MEASUREMENTS	Length	Confidence
Ridge	**70.0 LF**	56%
Hip	**0 LF**	52%
Valley	**21.0 LF**	55%
Rake	**60.0 LF**	55%
Eave	**141.0 LF**	62%
Step Flashing	**16.0 LF**	52%

WASTE CALCULATION — 1,099.214 sq ft base


Waste %	5%	10%	**12%**	15%	17%	20%
Area (sqft)	1,154	1,209	**1,231**	1,264	1,286	1,319
Squares	11.5	12.1	**12.3**	12.6	12.9	13.2

5 segments !' cross_gable roof detected. Area: segment_sum. No calibration data yet — uplo
improve accuracy.

PROPERTY PHOTOS


111 Wandle Ave, Bedford, OH 44146, USA

Aerial View — Satellite Imagery

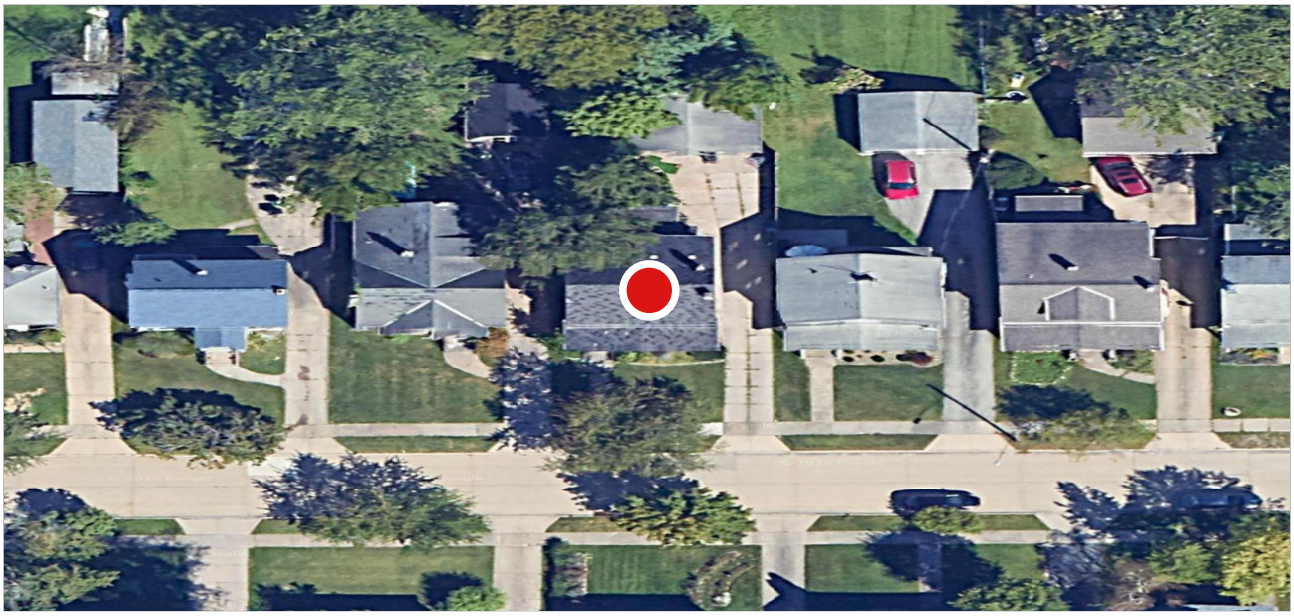


Directional Aerial Views (N / S / E / W)


North View

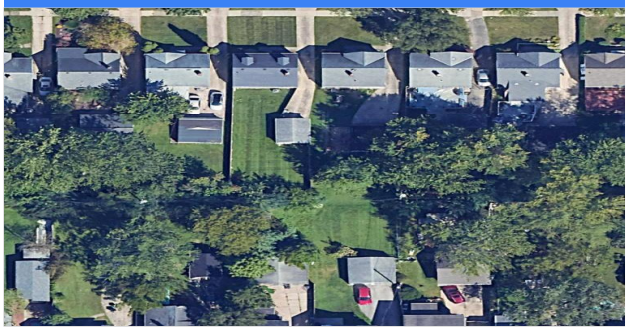


South View

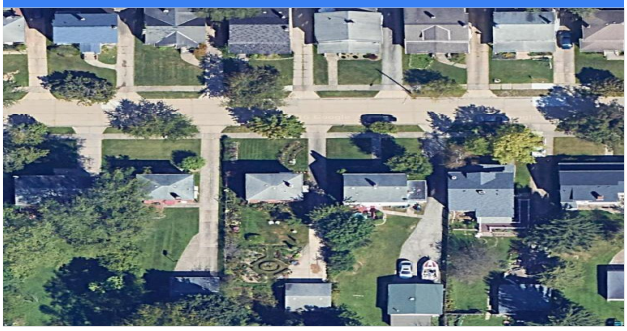

East View

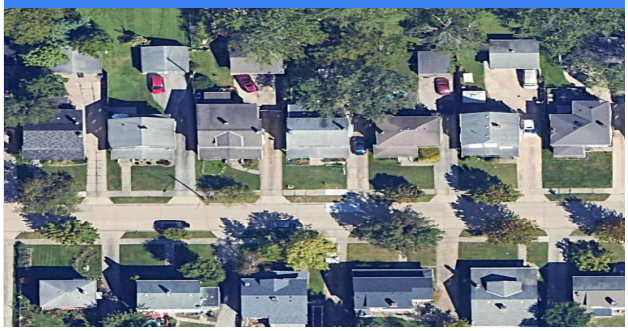

West View

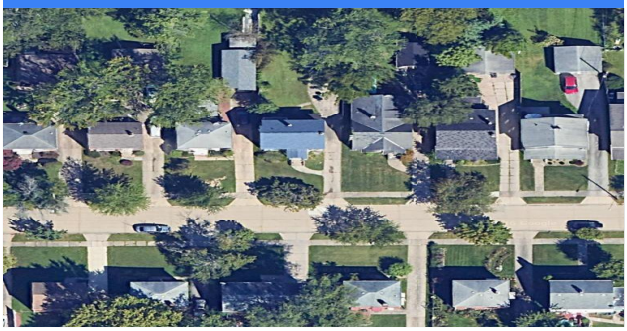

Satellite imagery sourced from Google Maps. Used for reference only.

NOTE:

This price is only valid for 30 days from estimate date, and is based on a deposit of half down upon acceptance of estimate and the remaining half due upon completion of work.

The estimate is hereby based on seen, disclosed, or otherwise obvious damage. The repair of the covered loss may be higher than these figures because of other circumstances not yet discovered. Included in this estimate are the items that the Contractor believes necessary to return the property to pre loss condition.

Unseen, undisclosed, or otherwise not obvious conditions, if discovered later or during the course of repairs, will be considered not included.

If discovered, any necessary additional repairs will be submitted for supplemental coverage, based on current market pricing.

Terms & Conditions:

The following estimate is only an approximation of the damages suffered, or expenses incurred, by the insured. No warranty or representation with regard to the accuracy of the estimate is expressed or implied and none should be inferred. The actual damages suffered, or expenses incurred, could be higher or lower than the estimate, even significantly, depending on variances in a number of factors affecting the estimate and the accuracy of the information and assumptions upon which the estimate is based.

Production Manager