ROOF ESTIMATE

ROOF REPORT

DRAFT

July 4, 2026

A

PREPARED FOR

—


13721 Martin Dr, Garfield Heights, OH 44125, USA

PREPARED BY

—

Estimate Date: July 4, 2026

Property Image

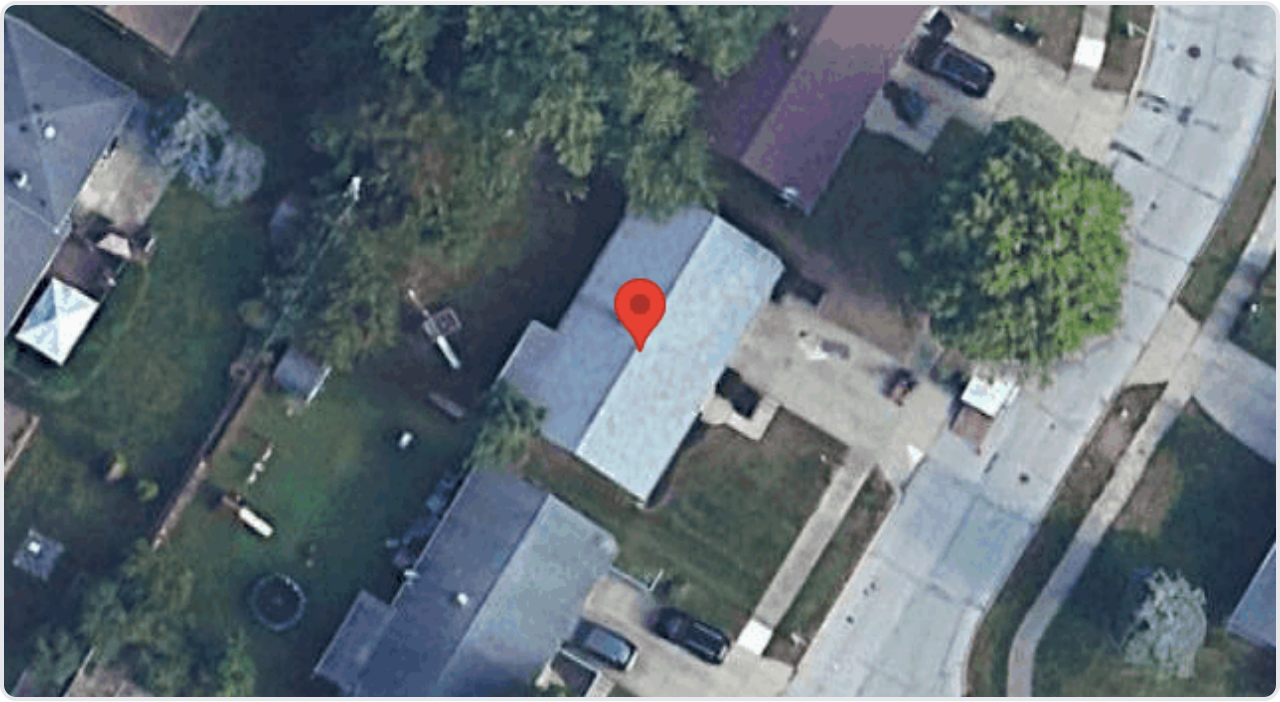

13721 Martin Dr, Garfield Heights, OH 44125, USA — Satellite imagery

Roof Summary

ROOF AREA	ORDER QUANTITY	PITCH	CONFIDENCE
16.4	**18.1**	**4/12**	**A**
SQ (1,641.703 sq ft)	SQ (+10% waste)	gable	86%

Linear Measurements

DRAFT

13721 Martin Dr, Garfield Heights, OH 44125, USA

MEASUREMENT	LENGTH	CONFIDENCE
Ridge	**48.0 LF**	76%
Hip	**0 LF**	79%
Valley	**0 LF**	72%
Rake	**68.0 LF**	76%
Eave	**96.0 LF**	73%
Step Flashing	**7.0 LF**	61%

Waste Calculation — 1,641.703 sq ft base

Waste %	5%	10%	12%	15%	17%	20%
Area (sq ft)	1,724	**1,806**	1,839	1,888	1,921	1,970
Squares	17.2	**18.1**	18.4	18.9	19.2	19.7

2 segments → gable roof detected. Area: segment_sum. No calibration data yet — upload EagleView/Hover reports to improve accuracy.

CompanySync • Generated July 4, 2026

Estimate Details

DRAFT

13721 Martin Dr, Garfield Heights, OH 44125, USA

CODE	DESCRIPTION	QTY	UNIT	RATE	RCV	ACV
LAMINATED_COMP_SH	Laminate - comp. shingle roofing - per SQ	18.39	SQ	$273.00	$5020.47	$5020.47
ROOFING_FELT_	Roofing felt -	18.39	SQ	$47.58	$875.00	$875.00
ICE__WATER_B	Ice & water barrier	355.04	SF	$2.02	$717.18	$717.18
COURSE	course	164	LF	$5.00	$820.00	$820.00
RR_DRIP_EDGE	R&R Drip edge	183.68	LF	$3.16	$580.43	$580.43
RR_RIDGE_CAP	R&R Ridge cap - venting ridge cap shingles	53.76	LF	$12.59	$676.84	$676.84
RR_FLASHING_14	R&R Flashing, 14" wide	7.84	LF	$5.52	$43.28	$43.28
REMOVE_3_TAB	Remove 3 tab - 25 yr. - comp. shingle roofing	18.39	SQ	$76.31	$1403.34	$1403.34
RR_FLASHING__PIPE_JA	R&R Flashing - pipe jack -	1	EA	$102.17	$102.17	$102.17
10	-	2	EA	$3.00	$6.00	$6.00
				Total RCV:	**$10244.70**	**$10244.70**

CompanySync • Generated July 4, 2026 • This estimate is valid for 30 days from the date shown.