Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)						Claim #061285782, Fabiano Fernandes
Approved						
ROOFPLAN: Roofplan						
Roof						
Roof area: 2,547.76 SF **Squares:** 25.5 SQ **Soffit:** 274.92 SF **Eaves:** 221.63 LF **Ridge:** 38.31 LF						
GUTTERS / DOWNSPOUTS / FASCIA						
1 Tear Out - Gutter, K-Style, Aluminum, 5"	31.91	$1.60	LF	$51.06	$0.00	$51.06
2 Replace - Gutter, K-Style, Aluminum, 5"	33.51	$10.39	LF	$348.17	$84.90	$263.27
Includes 5% waste on quantity.						
3 Tear Out - Downspout, Aluminum, 2"x3"	223.00	$1.28	LF	$285.44	$0.00	$285.44
4 Replace - Downspout, Aluminum, 2"x3"	234.15	$8.99	LF	$2,105.01	$495.93	$1,609.08
Includes 5% waste on quantity.						
5 Replace - Gutter Screens, Standard	33.51	$4.98	LF	$166.88	$35.52	$131.36
Includes 5% waste on quantity.						
SHINGLES						
6 ITEL, Shingles, Laminated/Architectural, Tear Out	25.48	$73.76	SQ	$1,879.40	$0.00	$1,879.40
7 ITEL, Shingles, Laminated/Architectural, Good, Supply	27.52 (27.67)	$121.97	SQ	$3,374.91	$1,349.96	$2,024.95
Materials quantity bundle rounding applied.						
Includes 8% waste on quantity.						
This line item includes a shingle material allowance per square, which reflects current market prices in your area. Market prices were verified by ITEL. The ITEL Asphalt Shingle Program allows you or your contractor of choice to have materials delivered directly to you. For more information on ordering shingles through ITEL, contact them at customerservice@itelinc.com or 800-890-4835.						
8 ITEL, Shingles, Laminated/Architectural, Good, Install	27.52	$155.06	SQ	$4,267.25	$90.48	$4,176.77
Includes 8% waste on quantity.						
9 Replace - Shingles, Starter Row, Eave, Continuous	234.26	$2.18	LF	$510.69	$85.74	$424.95
This item has been applied to the eaves						
Includes 6% waste on quantity.						
10 Replace - Ridge Cap Shingles, 3-Tab	188.29	$5.09	LF	$958.39	$137.83	$820.56
Includes 10% waste on quantity.						
11 Tear Out - Height Allowance, Roof Covering, 2 Story	17.09	$23.05	SQ	$393.92	$0.00	$393.92
12 Replace - Height Allowance, Roof Covering, 2 Story	17.09	$26.13	SQ	$446.56	$0.00	$446.56
13 Tear Out - Steep Roof Charge, Asphalt Shingle Roof, 7/12-9/12	8.86	$19.36	SQ	$171.53	$0.00	$171.53
14 Replace - Steep Roof Charge, Asphalt Shingle Roof, 7/12-9/12	8.86	$36.68	SQ	$324.98	$0.00	$324.98
UNDERLAYMENTS						
15 Replace - Felt, Single Layer, 15 lb.	26.75	$36.32	SQ	$971.56	$145.09	$826.47
Includes 5% waste on quantity.						
VENTS AND FLASHINGS						


Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)					Claim #061285782, Fabiano Fernandes	
Approved						
16 Replace - Drip Edge, Eave/Rake, Aluminum, Pre-Finished Color	268.00	$3.71	LF	$994.28	$260.50	$733.78
Includes 5% waste on quantity.						
17 Replace - Ridge Vent, Composite/PVC, Shingle-Over	40.23	$8.58	LF	$345.18	$87.17	$258.01
Includes 5% waste on quantity.						
18 Replace - Roof Vent, Static, Box/Turtle, Aluminum	6	$72.28	EA	$433.68	$111.86	$321.82
Roof - Subtotal *(22 items)*				**$18,028.89**	**$2,884.98**	**$15,143.91**
Gutter & Downspout						
Debris Removal						
19 ~~Dumpster, 20 Yard~~	~~1~~	~~$600.73~~	~~EA~~	~~$600.73~~	~~$0.00~~	~~$600.73~~
Tax override applied - State applied to materials, labor, equipment.						
Tax override applied - County applied to materials, labor, equipment.						
Gutter & Downspout - Subtotal *(1 item)*				**$600.73**	**$0.00**	**$600.73**
Deck						
20 Clean - Decking	909.00	$0.41	SF	$372.69	$0.00	$372.69
Tax override applied - County applied to materials, labor, equipment.						
Tax override applied - State applied to materials, labor, equipment.						
21 Stain, 1 Coat - Decking	909.00	$1.00	SF	$909.00	$74.99	$834.01
22 Clean - Deck Railing	52.00	$2.10	LF	$109.20	$0.00	$109.20
Tax override applied - State applied to materials, labor, equipment.						
Tax override applied - County applied to materials, labor, equipment.						
23 Paint, 1 Coat - Deck Railing, Wood	52.00	$5.14	LF	$267.28	$23.40	$243.88
Deck - Subtotal *(4 items)*				**$1,658.17**	**$98.39**	**$1,559.78**
Roofplan - Subtotal *(27 items)*				**$20,287.79**	**$2,983.37**	**$17,304.42**

EXTERIOR PLAN: Exterior Plan

Exterior Plan

Exterior: 2,795.76 SF
Footprint: 0.00 SF
Subtractions: 348.75 SF
Building perimeter (ground): 31.94 LF

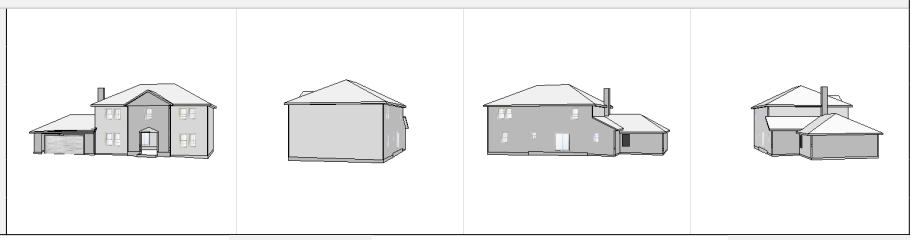

24 Tear Out - Light Fixture, Exterior, Dusk-to-Dawn, Good	3	$12.94	EA	$38.82	$0.00	$38.82
25 Replace - Light Fixture, Exterior, Dusk-to-Dawn, Good	3	$87.92	EA	$263.76	$69.86	$193.90
HOUSEWRAP / INSULATION						
Code Upgrade						
26 ~~Replace - Vapor Barrier, Shelter/House Wrap~~	~~2,795.76~~	~~$0.38~~	~~SF~~	~~$1,062.38~~	~~$0.00~~	~~$1,062.38~~
SIDING ITEMS						

Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)					Claim #061285782, Fabiano Fernandes	
Approved						
27 Tear Out - Siding, Lap, Aluminum, 0.019"	2,331.00	$1.20	SF	$2,797.20	$0.00	$2,797.20
28 Replace - Siding, Lap, Aluminum, 0.019"	2,470.86	$6.81	SF	$16,826.56	$2,253.42	$14,573.14
Includes 6% waste on quantity.						
29 Tear Out - J-Channel Trim, Aluminum	529.75	$0.48	LF	$254.28	$0.00	$254.28
30 Replace - J-Channel Trim, Aluminum	556.24	$3.74	LF	$2,080.34	$172.21	$1,908.13
Includes 5% waste on quantity.						
31 Tear Out - Corner Trim, Aluminum, Outside	130.00	$1.28	LF	$166.40	$0.00	$166.40
32 Replace - Corner Trim, Aluminum, Outside	136.50	$6.42	LF	$876.33	$139.56	$736.77
Includes 5% waste on quantity.						
33 Tear Out - Corner Trim, Aluminum, Inside	60.00	$1.28	LF	$76.80	$0.00	$76.80
34 Replace - Corner Trim, Aluminum, Inside	63.00	$6.57	LF	$413.91	$55.19	$358.72
Includes 5% waste on quantity.						
35 Tear Out - Height Allowance, Siding	559.15	$0.08	SF	$44.73	$0.00	$44.73
36 Replace - Height Allowance, Siding	559.15	$0.38	SF	$212.48	$0.00	$212.48
WINDOW ITEMS						
37 Tear Out - Window Screen, Aluminum, Over 10 SF	4	$1.52	EA	$6.08	$0.00	$6.08
38 Replace - Window Screen, Aluminum, Over 10 SF	4	$52.08	EA	$208.32	$80.01	$128.31
39 Replace - Entry Door, Slab Only, Flush, Steel, Good	1	$413.44	EA	$413.44	$90.58	$322.86
40 Replace - Lockset, Exterior, Good	1	$100.13	EA	$100.13	$15.88	$84.25
41 Add-on, Alter Door Opening	21.00	$3.53	SF	$74.13	$0.00	$74.13
42 Prime & Paint - Entry Door, Flush	2	$54.28	EA	$108.56	$16.07	$92.49
43 Tear Out - Window/Door Wrap, Aluminum, Less Than 4 Bends	148.00	$0.88	LF	$130.24	$0.00	$130.24
44 Replace - Window/Door Wrap, Aluminum, Less Than 4 Bends	162.80	$8.84	LF	$1,439.15	$83.61	$1,355.54
Includes 10% waste on quantity.						
Exterior Plan - Subtotal *(24 items)*				**$27,594.04**	**$2,976.39**	**$24,617.65**
Exterior Plan - Subtotal *(24 items)*				**$27,594.04**	**$2,976.39**	**$24,617.65**
Minimum Charge Adjustments						
45 Minimum Charge, Finish Carpenter	1	$422.36	LS	$348.23	$0.00	$348.23
46 Minimum Charge, Electrical	1	$454.08	LS	$151.50	$0.00	$151.50
Minimum Charge Adjustments - Subtotal *(8 items)*				**$499.73**	**$0.00**	**$499.73**
Subtotal				**$48,381.56**	**$5,959.76**	**$42,421.80**

Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure (Your Insurance Claims Network, LLC) Claim #061285782, Fabiano Fernandes

Approved

Total Materials:	$19,294.90
Total Labor:	$28,970.44
Total Equipment:	$116.22
Total Market Conditions:	$0.00
Subtotal:	**$48,381.56**
State 5.750% (applies to materials only, some items overridden):	$1,134.72
County 2.250% (applies to materials only, some items overridden):	$444.03
Subtotal:	**$49,960.31**
Add 0.00% overhead:	$0.00
Add 0.00% profit:	$0.00
Replacement Cost Value:	**$49,960.31**
Replacement Cost on Coverage Building ($652,900.00 limit):	$49,960.31
Less Code Upgrade	$(1,104.87)
Less Debris Removal	$(648.79)
Less Recoverable Depreciation:	$(5,959.76)
Net Actual Cash Value on Coverage Building:	**$42,246.89**
Estimate Total on Coverage Building:	**$42,246.89**
Recoverable Depreciation:	$5,959.76
Paid When Incurred: Code Upgrade	$1,104.87
Paid When Incurred: Debris Removal	$648.79
Net Coverage Building if Depreciation Is Recovered and Costs Are Incurred:	$49,960.31
Estimate Total on Coverage Building if Depreciation Is Recovered and Costs Are Incurred:	**$49,960.31**
Deductible ($1,000.00):	$(1,000.00)
Net Estimate:	**$41,246.89**
Total Net Recoverable Depreciation and Costs Incurred:	$7,713.42
Net Estimate if Depreciation Is Recovered and Costs Are Incurred:	**$48,960.31**

Finalization