September 08, 2026

JOSEPH RADACOVSKY
15309 Ramage Ave
Maple Heights, OH 44137-4045

Claim Number: 01010126537
Date of Loss: 4/15/2026

Summary For Coverage A - Dwelling

Replacement Cost Value	Paid When Incurred	Less Non Recoverable Depreciation	Actual Cash Value (ACV)
$9,384.89	($70.12)	<$789.57>	$8,525.20
Less Deductible			($2,500.00)
Total ACV Settlement			**$6,025.20**

Summary For Coverage B - Other Structures Blanket

Replacement Cost Value	Less Recoverable Depreciation	Less Non Recoverable Depreciation	Actual Cash Value (ACV)
$2,580.02		<$377.45>	$2,202.57
Total ACV Settlement			**$2,202.57**

Total Outstanding ACV Settlement (All Coverages) **$8,227.77**

Understanding Your Property Estimate

Unit of Measure

HR – Hour	**LF – Linear Foot**	**EA – Each**	**SQ – Square**	**SF – Square Foot**
SY – Square Yard	**DA – Day**	**CY – Cubic Yard**	**CF – Cubic Foot**	**RM - Room**

Estimate Cover Page.....

The estimate cover page provides the following information:

- A. Your adjuster's contact information
- B. Your claim number

  ***Important information about the claims process will be on the second page of your estimate.**

Estimate Details.....


The estimate details outline the damages covered by your policy, which is important to share with your contractor.

- C. **Description** – Details describing the action or item being estimated.
- D. **Quantity** – The number of units for an item.
- E. **Unit** – The cost of a single unit.
- F. **Replacement Cost Value (RCV)** – The estimated cost of repairing a damaged item or replacing an item with a similar one. RCV is calculated by multiplying Quantity x Unit.
- G. **Age/Life** – The current age and its life expectancy.
- H. **Depreciation** – Loss of value that has occurred over time due to factors such as age and wear and tear. If depreciation is recoverable, the amount shown will be in parenthesis. *For example (81.61)*
- I. **Non Recoverable Depreciation** – If depreciation is non-recoverable, the amount shown will be shown in brackets. *For example, <506.94>*
- J. **Actual Cash Value (ACV)** – The estimated value of the item or damage at the time of the loss. Generally, ACV is calculated as Replacement Cost Value (RCV) minus Depreciation.
- K. **Totals** – The total RCV, depreciation and ACV for that area.
- L. **Labor Minimum** – Additional labor to perform small repairs for a certain trade.

Your Estimate Summary.....

Each line of coverage in your estimate has a summary page that shows the total estimated cost (RCV and ACV) and the net claim amount for the coverage included in your policy. The example to the right shows both Dwelling and Other Structure coverage summaries.

- M. **Line Item Total** – The sum of all the line items for that particular coverage.
- N. **Replacement Cost Value** – The total RCV of all items for that coverage.
- O. **Actual Cash Value** – The total ACV of all items for that coverage.
- P. **Deductible** – This is the amount of the loss that you are responsible for. Some polices have different deductibles that could apply based on the type of loss you sustained. Please refer to your policy declarations page for further explanation.
- Q. **Net Claim** – The amount payable to you after depreciation and deductible have been applied. This amount can never be greater than your coverage limit.
- R. **Total Recoverable Depreciation** – The total amount of depreciation you can potentially recover.

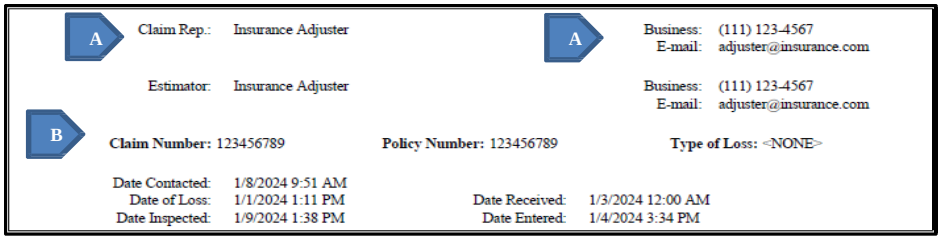


A — Claim Rep.: Insurance Adjuster — Business: (111) 123-4567, E-mail: adjuster@insurance.com

A — Estimator: Insurance Adjuster — Business: (111) 123-4567, E-mail: adjuster@insurance.com

B — **Claim Number:** 123456789 **Policy Number:** 123456789 **Type of Loss:** <NONE>

Date Contacted: 1/8/2024 9:51 AM
Date of Loss: 1/1/2024 1:11 PM
Date Inspected: 1/9/2024 1:38 PM
Date Received: 1/3/2024 12:00 AM
Date Entered: 1/4/2024 3:34 PM

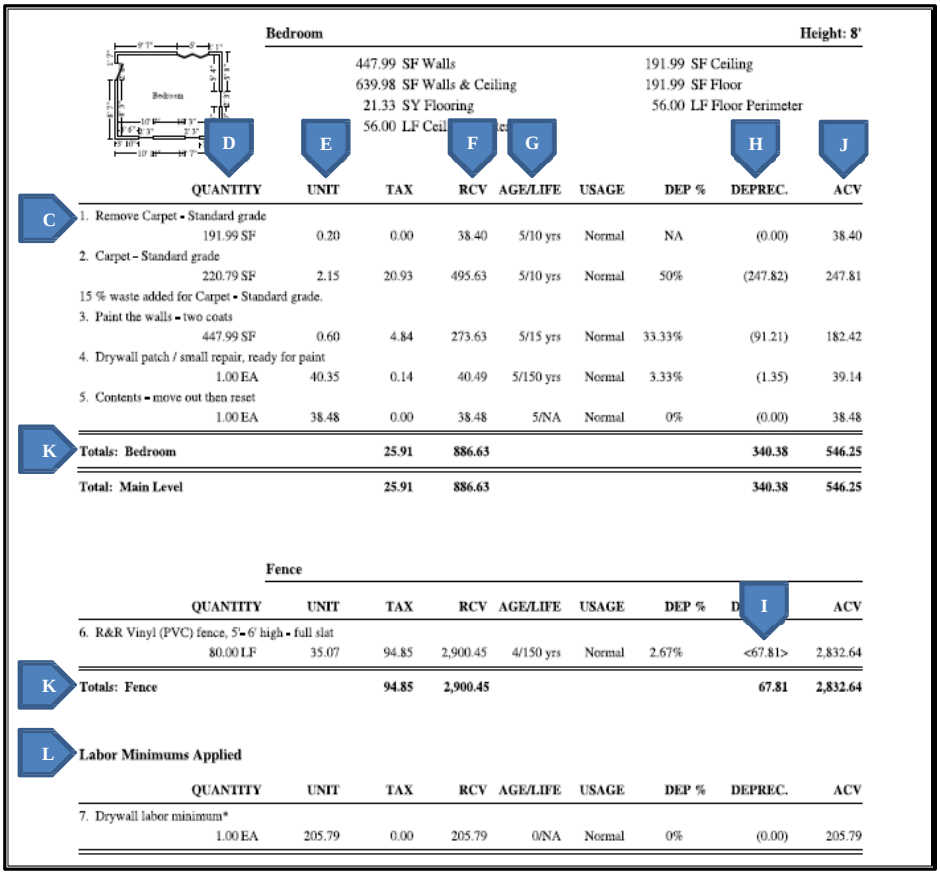

Bedroom **Height: 8'**

447.99 SF Walls
639.98 SF Walls & Ceiling
21.33 SY Flooring
56.00 LF Ceil...
191.99 SF Ceiling
191.99 SF Floor
56.00 LF Floor Perimeter


	D QUANTITY	E UNIT	TAX	F RCV	G AGE/LIFE	USAGE	DEP %	H DEPREC.	J ACV
C 1. Remove Carpet - Standard grade	191.99 SF	0.20	0.00	38.40	5/10 yrs	Normal	NA	(0.00)	38.40
2. Carpet - Standard grade	220.79 SF	2.15	20.93	495.63	5/10 yrs	Normal	50%	(247.82)	247.81
15 % waste added for Carpet - Standard grade.									
3. Paint the walls - two coats	447.99 SF	0.60	4.84	273.63	5/15 yrs	Normal	33.33%	(91.21)	182.42
4. Drywall patch / small repair, ready for paint	1.00 EA	40.35	0.14	40.49	5/150 yrs	Normal	3.33%	(1.35)	39.14
5. Contents - move out then reset	1.00 EA	38.48	0.00	38.48	5/NA	Normal	0%	(0.00)	38.48
K **Totals: Bedroom**				**25.91**	**886.63**			**340.38**	**546.25**
Total: Main Level				**25.91**	**886.63**			**340.38**	**546.25**

Fence

	QUANTITY	UNIT	TAX	RCV	AGE/LIFE	USAGE	DEP %	I	ACV
6. R&R Vinyl (PVC) fence, 5'- 6' high - full slat	80.00 LF	35.07	94.85	2,900.45	4/150 yrs	Normal	2.67%	<67.81>	2,832.64
K **Totals: Fence**			**94.85**	**2,900.45**				**67.81**	**2,832.64**


L **Labor Minimums Applied**

	QUANTITY	UNIT	TAX	RCV	AGE/LIFE	USAGE	DEP %	DEPREC.	ACV
7. Drywall labor minimum*	1.00 EA	205.79	0.00	205.79	0/NA	Normal	0%	(0.00)	205.79

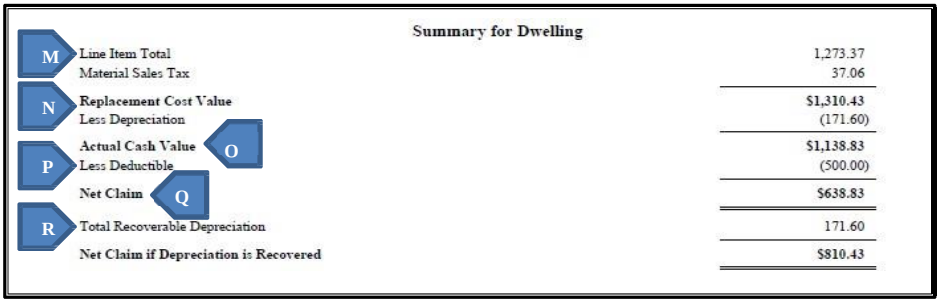

Summary for Dwelling

M Line Item Total	1,273.37
Material Sales Tax	37.06
N **Replacement Cost Value**	**$1,310.43**
Less Depreciation	(171.60)
Actual Cash Value O	**$1,138.83**
P Less Deductible	(500.00)
Net Claim Q	**$638.83**
R Total Recoverable Depreciation	171.60
Net Claim if Depreciation is Recovered	**$810.43**

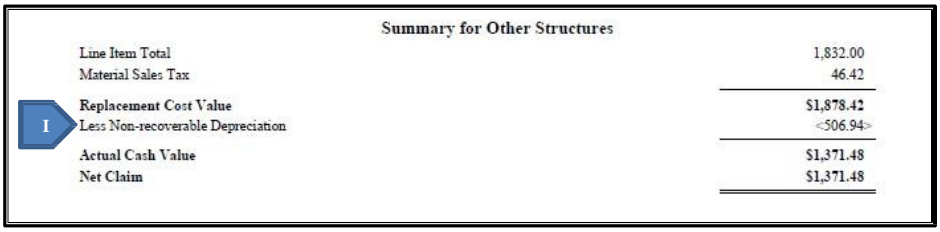

Summary for Other Structures

Line Item Total	1,832.00
Material Sales Tax	46.42
Replacement Cost Value	**$1,878.42**
I Less Non-recoverable Depreciation	<506.94>
Actual Cash Value	**$1,371.48**
Net Claim	**$1,371.48**

Note that not all details explained here may be applicable to your claim, policy, or state

Insured:	JOSEPH RADACOVSKY 15309 Ramage Ave Maple Heights, OH 44137-4045	Phone:	(216) 905-5013
Claim Rep.:	Ralphael Smoak		
Estimator:	Ralphael Smoak		

Claim Number: 01010126537 **Policy Number:** 43893105 **Type of Loss:** Hail

Coverage	Deductible	Policy Limit
Coverage A - Dwelling	$2,500.00	$225,000.00
Coverage B - Other Structures Blanket	$0.00	$22,500.00
Coverage C - Personal Property	$0.00	$112,500.00
Coverage D - Loss Of Use	$0.00	$67,500.00

Date Contacted:	9/2/2026 11:56 AM
Date of Loss:	4/15/2026 11:00 AM
Date Est. Completed:	9/8/2026 10:30 AM

Price List:	OHCL8X_AUG26 Restoration/Service/Remodel		
Sales Taxes:	Material Tax	@	0.000%
	Material Sales Tax	@	8.000%
	Cln Matl Tax	@	8.000%
	Cln&Carpet Svc Tax	@	8.000%

Estimate Recap For Coverage A - Dwelling

Description	RCV	Recoverable Depreciation	Non-recoverable Depreciation	ACV
Source - Hover - Exterior - Roofing	8,078.23	0.00	789.57	7,288.66
Source - Hover 2 - Exterior - Siding	265.24	33.13	0.00	232.11
Source - Hover 2 - Interior - Kitchen	1,041.42	36.99	0.00	1,004.43
	9,384.89	**70.12**	**789.57**	**8,525.20**


Estimate Recap For Coverage B - Other Structures Blanket

Description	RCV	Recoverable Depreciation	Non-recoverable Depreciation	ACV
Roofing - Exterior - Detached garage	2,580.02	0.00	377.45	2,202.57
	2,580.02	**0.00**	**377.45**	**2,202.57**

JOSEPH_RADACOVSKY

Source - Hover

Exterior



Roofing

1165.94	Surface Area	11.66	Number of Squares
157.08	Total Perimeter Length	44.67	Total Ridge Length


	QUANTITY	UNIT	TAX	RCV	AGE/LIFE	COND.	DEP %		DEPREC.	ACV
The following line items account for replacement of the roof of this structure.										
The policy information provided indicates that the roof and related components are 10 years old. Based on the Roof Surface Payment Schedule included with the homeowners policy, the final settlement amount is 70% of the total replacement cost.										
1. Tear off composition shingles - Laminated (no haul off)										
	11.66 SQ	51.98	0.00	606.09	0/30 yrs	Avg.	NA	[%]	<0.00>	606.09
2. Laminated - comp. shingle rfg. - w/out felt										
	12.98 SQ	286.66	134.48	3,855.33	0/30 yrs	Avg.	30%	[%]	<544.65>	3,310.68
Auto Calculated Waste: 11.3%, 1.32SQ										
Options: Valleys: Open, Include eave starter course: Yes, Include rake starter course: Yes, Exposure - Hip/Valley/Starter: 5 5/8",										
Pricing from ITEL Asphalt Shingle Pricing (ASP) applied to RFG300 on 5 Sep 2026. *This line item includes a roofing material allowance which reflects current market prices in your area. Market prices were provided by itel on [DATE_PRICED]. The itel Asphalt Shingle Pricing (ASP) service allows you or your contractor of choice the option to source materials through itel. For more information on ordering material through itel, visit https://itelinc.jotform.com/itelinc/shingle_inquiry or contact itel at customerservice@itelinc.com / 800-890-4835.*										
3. Roofing felt - 15 lb.										
	7.31 SQ	41.24	4.82	306.28	0/20 yrs	Avg.	30%	[%]	<19.52>	286.76
Felt minus ice and water shield .										
4. Ice & water barrier										
	434.81 SF	2.03	18.78	901.44	0/30 yrs	Avg.	30%	[%]	<76.07>	825.37
5. Hip / Ridge cap - Standard profile - composition shingles										
	44.67 LF	7.01	11.36	324.50	0/30 yrs	Avg.	30%	[%]	<46.03>	278.47
6. Drip edge										
	157.08 LF	3.19	14.07	515.16	0/35 yrs	Avg.	30%	[%]	<57.00>	458.16
7. Flashing - pipe jack - lead										
	1.00 EA	94.68	4.25	98.93	0/35 yrs	Avg.	30%	[%]	<17.22>	81.71
8. Roof vent - turtle type - Metal										
	2.00 EA	80.33	4.00	164.66	0/35 yrs	Avg.	30%	[%]	<16.19>	148.47
9. Exhaust cap - through roof - up to 4"										
	1.00 EA	106.23	3.18	109.41	0/35 yrs	Avg.	30%	[%]	<12.89>	96.52
10. Remove Additional charge for steep roof - 7/12 to 9/12 slope										
	11.66 SQ	17.80	0.00	207.55	0/NA	Avg.	NA	[%]	<0.00>	207.55
11. Additional charge for steep roof - 7/12 to 9/12 slope										
	11.66 SQ	53.84	0.00	627.77	0/NA	Avg.	30%	[%]	<0.00>	627.77
12. Single axle dump truck - per load - including dump fees										
	1.00 EA	361.11	0.00	361.11	0/NA	Avg.	NA	[%]	<0.00>	361.11

CONTINUED - Roofing

	QUANTITY	UNIT	TAX	RCV	AGE/LIFE	COND.	DEP %	DEPREC.	ACV
Totals: Roofing			**194.94**	**8,078.23**				**789.57**	**7,288.66**
Total: Exterior			**194.94**	**8,078.23**				**789.57**	**7,288.66**
Total: Source - Hover			**194.94**	**8,078.23**				**789.57**	**7,288.66**

Roofing

Exterior



Detached garage

549.54 Surface Area
93.81 Total Perimeter Length
5.50 Number of Squares
24.17 Total Ridge Length

	QUANTITY	UNIT	TAX	RCV	AGE/LIFE	COND.	DEP %	DEPREC.	ACV
The following line items account for replacement of the roof of this structure.									
The policy information provided indicates that the roof and related components are 10 years old. Based on the Roof Surface Payment Schedule included with the homeowners policy, the final settlement amount is 60% of the total replacement cost.									
13. Tear off composition shingles - 3 tab (no haul off)	5.50 SQ	51.98	0.00	285.89	0/25 yrs	Avg.	NA [%]	<0.00>	285.89
14. 3 tab - 25 yr. - comp. shingle roofing - w/out felt	6.33 SQ	268.27	57.87	1,756.02	0/25 yrs	Avg.	40% [%]	<312.48>	1,443.54
Auto Calculated Waste: 15.2%, 0.83SQ Options: Valleys: Open, Include eave starter course: Yes, Include rake starter course: Yes, Include ridge/hip cap: Yes, Exposure - Hip/Valley/Starter: 5",									
Pricing from ITEL Asphalt Shingle Pricing (ASP) applied to RFG240 on 5 Sep 2026. *This line item includes a roofing material allowance which reflects current market prices in your area. Market prices were provided by itel on [DATE_PRICED]. The itel Asphalt Shingle Pricing (ASP) service allows you or your contractor of choice the option to source materials through itel. For more information on ordering material through itel, visit https://itelinc.jotform.com/itelinc/shingle_inquiry or contact itel at customerservice@itelinc.com / 800-890-4835.*									
15. Roofing felt - 15 lb.	5.50 SQ	41.24	3.63	230.45	0/20 yrs	Avg.	40% [%]	<19.58>	210.87
Felt minus ice and water shield.									
17. Drip edge	93.81 LF	3.19	8.41	307.66	0/35 yrs	Avg.	40% [%]	<45.39>	262.27
Totals: Detached garage			**69.91**	**2,580.02**				**377.45**	**2,202.57**

Total: Exterior		**69.91**	**2,580.02**				**377.45**	**2,202.57**
Total: Roofing		**69.91**	**2,580.02**				**377.45**	**2,202.57**


Source - Hover 2

Exterior

Siding

QUANTITY	UNIT	TAX	RCV	AGE/LIFE	COND.	DEP %	DEPREC.	ACV
The following line item(s) accounts for the replacement of the damaged vinyl siding on the left elevation(s).								
Includes: Vinyl siding, starter strip, under sill trim, j-trim, outside corner post, 16 gauge staples and installation labor.								
18. R&R Siding - vinyl								
36.00 SF	6.79	7.26	251.70	10/50 yrs	Avg.	20%	(19.59)	232.11
~~19. House wrap (air/moisture barrier)~~								
~~36.00 SF~~	~~0.36~~	~~0.58~~	~~13.54~~	~~10/150 yrs~~	~~Avg.~~	~~6.67%~~	~~(0.00)~~	~~13.54~~
The payment for this item has not yet been incurred.								
Totals: Siding		**7.26**	**251.70**				**19.59**	**232.11**
Total: Exterior		**7.26**	**251.70**				**19.59**	**232.11**

Interior



Kitchen **Height: 8'**

422.67	SF Walls	173.00	SF Ceiling
595.67	SF Walls & Ceiling	173.00	SF Floor
19.22	SY Flooring	52.83	LF Floor Perimeter
52.83	LF Ceil. Perimeter		

QUANTITY	UNIT	TAX	RCV	AGE/LIFE	COND.	DEP %	DEPREC.	ACV
The following line items account for the repair and/or replacement of the damaged items within the kitchen.								
20. R&R Blown-in insulation - 10" depth - R26								
32.00 SF	2.61	2.43	85.95	10/150 yrs	Avg.	6.67%	(2.19)	83.76
21. Apply anti-microbial agent to the ceiling								
173.00 SF	0.34	5.45	64.27	10/NA	Avg.	0%	(0.00)	64.27
22. R&R 5/8" drywall - hung, taped, ready for texture								
64.00 SF	3.67	3.84	238.72	10/150 yrs	Avg.	6.67%	(3.46)	235.26
23. Texture drywall - machine								
173.00 SF	0.94	0.97	163.59	10/150 yrs	Avg.	6.67%	(0.87)	162.72
24. Contents - move out then reset								
1.00 EA	81.01	0.00	81.01	10/NA	Avg.	0%	(0.00)	81.01

CONTINUED - Kitchen

	QUANTITY	UNIT	TAX	RCV	AGE/LIFE	COND.	DEP %	DEPREC.	ACV
25. Mask and prep for paint - paper and tape (per LF)									
	173.00 LF	0.98	0.83	170.37	10/15 yrs	Avg.	66.67%	(7.47)	162.90
26. Mask and cover large light fixture									
	1.00 EA	24.11	0.06	24.17	10/15 yrs	Avg.	66.67%	(0.58)	23.59
27. Paint the ceiling - one coat									
	173.00 SF	0.83	2.49	146.08	10/15 yrs	Avg.	66.67%	(22.42)	123.66
28. Final cleaning - construction - Residential									
	173.00 SF	0.36	4.98	67.26	10/NA	Avg.	0%	(0.00)	67.26
Totals: Kitchen			**21.05**	**1,041.42**				**36.99**	**1,004.43**
Total: Interior			**21.05**	**1,041.42**				**36.99**	**1,004.43**
Total: Source - Hover 2			**28.31**	**1,293.12**				**56.58**	**1,236.54**
Line Item Totals: JOSEPH_ RADACOVSKY			**293.16**	**11,951.37**				**1,223.60**	**10,727.77**

[%] - Indicates that depreciate by percent was used for this item

[M] - Indicates that the depreciation percentage was limited by the maximum allowable depreciation for this item

Grand Total Areas:

4,159.66	SF Walls	173.00	SF Ceiling	4,332.66	SF Walls and Ceiling
173.00	SF Floor	19.22	SY Flooring	931.36	LF Floor Perimeter
0.00	SF Long Wall	0.00	SF Short Wall	52.83	LF Ceil. Perimeter
173.00	Floor Area	191.06	Total Area	422.67	Interior Wall Area
4,236.49	Exterior Wall Area	934.02	Exterior Perimeter of Walls		
2,881.41	Surface Area	28.81	Number of Squares	407.98	Total Perimeter Length
113.52	Total Ridge Length	0.00	Total Hip Length		

Coverage	Item Total	%	ACV Total	%
Coverage A - Dwelling	9,371.35	78.41%	8,525.20	79.47%
Coverage B - Other Structures Blanket	2,580.02	21.59%	2,202.57	20.53%
Coverage C - Personal Property	0.00	0.00%	0.00	0.00%
Coverage D - Loss Of Use	0.00	0.00%	0.00	0.00%
Total	11,951.37	100.00%	10,727.77	100.00%

Summary for Coverage A - Dwelling

Line Item Total		9,148.10
Material Sales Tax		212.82
Cln Matl Tax		0.69
Subtotal		9,361.61
Cln&Carpet Svc Tax		9.74
Replacement Cost Value		**$9,371.35**
Less Depreciation		(846.15)
Actual Cash Value		**$8,525.20**
Less Deductible		(2,500.00)
Net Claim		**$6,025.20**
Total Depreciation	846.15	
Less Non-Recoverable Depreciation	<789.57>	
Total Recoverable Depreciation		56.58
Total Paid When Incurred		13.54
Net Claim if Additional Amounts are Recovered		**$6,095.32**

Additional Amounts include depreciation that has been recovered and Paid When Incurred (PWI) items. Paid When Incurred (PWI) items refer to items, which may not be necessary in the repair of your property damaged by a covered loss. If incurred, or completed, reimbursement of reasonable costs will be made up to the maximum amounts identified as eligible for PWI in the estimate.

Coverage A - Dwelling Paid When Incurred

Line Item Total	12.96
Material Sales Tax	0.58
Replacement Cost Value	**$13.54**
Total Paid When Incurred	**$13.54**
Net Claim	**$6,025.20**
Net Claim if Additional Amounts are Recovered	**$6,095.32**

Ralphael Smoak

Summary for Coverage B - Other Structures Blanket

Line Item Total	2,510.11
Material Sales Tax	69.91
Replacement Cost Value	**$2,580.02**
Less Non-recoverable Depreciation	<377.45>
Actual Cash Value	**$2,202.57**
Net Claim	**$2,202.57**

Ralphael Smoak

Recap of Taxes

	Material Tax (0%)	Material Sales Tax (8%)	Cln Matl Tax (8%)	Cln&Carpet Svc Tax (8%)
Line Items	0.00	282.73	0.69	9.74
Total	**0.00**	**282.73**	**0.69**	**9.74**

Recap by Room

Estimate: JOSEPH_RADACOVSKY

Area: Source - Hover

Area: Exterior

Roofing		**7,883.29**	**67.62%**
Coverage: Coverage A - Dwelling	100.00% =	7,883.29	
Area Subtotal: Exterior		**7,883.29**	**67.62%**
Coverage: Coverage A - Dwelling	100.00% =	7,883.29	
Area Subtotal: Source - Hover		**7,883.29**	**67.62%**
Coverage: Coverage A - Dwelling	100.00% =	7,883.29	

Area: Roofing

Area: Exterior

Detached garage		**2,510.11**	**21.53%**
Coverage: Coverage B - Other Structures Blanket	100.00% =	2,510.11	
Area Subtotal: Exterior		**2,510.11**	**21.53%**
Coverage: Coverage B - Other Structures Blanket	100.00% =	2,510.11	
Area Subtotal: Roofing		**2,510.11**	**21.53%**
Coverage: Coverage B - Other Structures Blanket	100.00% =	2,510.11	

Area: Source - Hover 2

Area: Exterior

Siding		**244.44**	**2.10%**
Coverage: Coverage A - Dwelling	100.00% =	244.44	
Area Subtotal: Exterior		**244.44**	**2.10%**
Coverage: Coverage A - Dwelling	100.00% =	244.44	

Area: Interior

Kitchen		**1,020.37**	**8.75%**
Coverage: Coverage A - Dwelling	100.00% =	1,020.37	
Area Subtotal: Interior		**1,020.37**	**8.75%**
Coverage: Coverage A - Dwelling	100.00% =	1,020.37	
Area Subtotal: Source - Hover 2		**1,264.81**	**10.85%**
Coverage: Coverage A - Dwelling	100.00% =	1,264.81	

Subtotal of Areas	**100.00%**

		11,658.21	
Coverage: Coverage A - Dwelling	78.47% =	9,148.10	
Coverage: Coverage B - Other Structures Blanket	21.53% =	2,510.11	
Total		**11,658.21**	**100.00%**

Recap by Category with Depreciation

Items				RCV	Deprec.	ACV
CLEANING				**62.28**		**62.28**
Coverage: Coverage A - Dwelling	@	100.00%	=	62.28		
CONTENT MANIPULATION				**81.01**		**81.01**
Coverage: Coverage A - Dwelling	@	100.00%	=	81.01		
GENERAL DEMOLITION				**1,557.40**		**1,557.40**
Coverage: Coverage A - Dwelling	@	81.64%	=	1,271.51		
Coverage: Coverage B - Other Structures Blanket	@	18.36%	=	285.89		
DRYWALL				**360.38**	**4.01**	**356.37**
Coverage: Coverage A - Dwelling	@	100.00%	=	360.38		
INSULATION				**45.12**	**2.03**	**43.09**
Coverage: Coverage A - Dwelling	@	100.00%	=	45.12		
PAINTING				**337.24**	**28.22**	**309.02**
Coverage: Coverage A - Dwelling	@	100.00%	=	337.24		
ROOFING				**8,932.76**	**1,080.59**	**7,852.17**
Coverage: Coverage A - Dwelling	@	75.10%	=	6,708.54		
Coverage: Coverage B - Other Structures Blanket	@	24.90%	=	2,224.22		
SIDING				**223.20**	**18.14**	**205.06**
Coverage: Coverage A - Dwelling	@	100.00%	=	223.20		
WATER EXTRACTION & REMEDIATION				**58.82**		**58.82**
Coverage: Coverage A - Dwelling	@	100.00%	=	58.82		
Subtotal				**11,658.21**	**1,132.99**	**10,525.22**
Material Sales Tax				**282.73**	**90.61**	**192.12**
Coverage: Coverage A - Dwelling	@	75.27%	=	212.82		
Coverage: Coverage B - Other Structures Blanket	@	24.73%	=	69.91		
Cln Matl Tax				**0.69**		**0.69**
Coverage: Coverage A - Dwelling	@	100.00%	=	0.69		
Cln&Carpet Svc Tax				**9.74**		**9.74**
Coverage: Coverage A - Dwelling	@	100.00%	=	9.74		
Total				**11,951.37**	**1,223.60**	**10,727.77**