Liberty Mutual Insurance

PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)						Claim #061296277, Stephanie Marilla
Approved						
ROOFPLAN: Roofplan						
Roof						
Roof area: 1,221.67 SF **Squares:** 12.2 SQ **Soffit:** 312.19 SF **Eaves:** 78.02 LF **Ridge:** 39.76 LF						
SHINGLES						
1 ITEL, Shingles, Laminated/Architectural, Tear Out	12.20	$73.76	SQ	$899.87	$0.00	$899.87
2 ITEL, Shingles, Laminated/Architectural, Good, Install	12.93	$155.06	SQ	$2,004.92	$56.68	$1,948.24
Includes 6% waste on quantity.						
3 ITEL, Shingles, Laminated/Architectural, Good, Supply	12.93 (13.00)	$121.97	SQ	$1,585.61	$845.61	$740.00
This line item includes a shingle material allowance per square, which reflects current market prices in your area. Market prices were verified by ITEL. The ITEL Asphalt Shingle Program allows you or your contractor of choice to have materials delivered directly to you. For more information on ordering shingles through ITEL, contact them at customerservice@itelinc.com or 800-890-4835.						
Includes 6% waste on quantity.						
Materials quantity bundle rounding applied.						
4 Replace - Ridge Cap Shingles, Laminated/Architectural	42.15	$6.51	LF	$274.40	$80.48	$193.92
Includes 6% waste on quantity.						
5 Replace - Shingles, Starter Row, Eave, Continuous	82.70	$2.18	LF	$180.29	$37.84	$142.45
Includes 6% waste on quantity.						
6 Replace - Shingles, Starter Row, Rake, Continuous	143.39	$2.18	LF	$312.59	$65.60	$246.99
Includes 6% waste on quantity.						
UNDERLAYMENTS						
7 Replace - Felt, Single Layer, 15 lb.	12.81	$36.32	SQ	$465.26	$86.85	$378.41
Includes 5% waste on quantity.						
VENTS AND FLASHINGS						
8 Replace - Step Flashing, Aluminum, Mill Finish	33.25	$6.83	LF	$227.10	$53.12	$173.98
Includes 5% waste on quantity.						
9 Replace - Drip Edge, Eave/Rake, Aluminum, Mill Finished	223.95	$3.12	LF	$698.73	$173.00	$525.73
Includes 5% waste on quantity.						
ROOF ACCESSORIES						
10 Replace - Roof Exhaust, Vent Cap, Painted Aluminum, Medium	3	$107.49	EA	$322.47	$109.46	$213.01
11 Replace - Flashing, Pipe Jack, Aluminum	1	$49.32	EA	$49.32	$13.71	$35.61
12 Rem/Reset - Satellite Dish, Mini	1	$143.06	EA	$143.06	$0.00	$143.06
ADDITIONAL CHARGES						
13 Tear Out - Steep Roof Charge, Asphalt Shingle Roof, 7/12-9/12	10.38	$19.36	SQ	$200.96	$0.00	$200.96


Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)					Claim #061296277, Stephanie Marilla	
Approved						
14 Replace - Steep Roof Charge, Asphalt Shingle Roof, 7/12-9/12	10.38	$36.68	SQ	$380.74	$0.00	$380.74
15 Tear Out - Height Allowance, Roof Covering, 2 Story	6.33	$23.05	SQ	$145.91	$0.00	$145.91
16 Replace - Height Allowance, Roof Covering, 2 Story	6.33	$26.13	SQ	$165.40	$0.00	$165.40
Roof - Subtotal *(21 items)*				**$8,056.63**	**$1,522.35**	**$6,534.28**
Roofplan - Subtotal *(21 items)*				**$8,056.63**	**$1,522.35**	**$6,534.28**

EXTERIOR PLAN: Exterior Plan

Exterior Plan

Exterior: 2,051.74 SF
Footprint: 0.00 SF
Subtractions: 216.32 SF
Building perimeter (ground): 141.06 LF

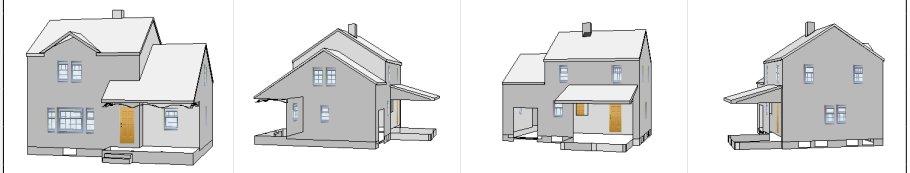

17 Tear Out - Window Screen, Aluminum, 6-10 SF	3	$1.52	EA	$4.56	$0.00	$4.56
18 Replace - Window Screen, Aluminum, 6-10 SF	3	$39.89	EA	$119.67	$51.21 ✔	$68.46
19 Tear Out - Window Screen, Aluminum, Over 10 SF	2	$1.52	EA	$3.04	$0.00	$3.04
20 Replace - Window Screen, Aluminum, Over 10 SF	2	$52.08	EA	$104.16	$40.01 ✔	$64.15
21 Tear Out - Post Wrap, Aluminum	3	$15.34	EA	$46.02	$0.00	$46.02
22 Replace - Post Wrap, Aluminum	3	$55.33	EA	$165.99	$35.94 ✔	$130.05
HOUSEWRAP / INSULATION						
Code Upgrade						
23 ~~Replace - Vapor Barrier, Shelter/House Wrap~~	~~2,051.74~~	~~$0.38~~	~~SF~~	~~$779.66~~	~~$0.00~~	~~$779.66~~
SIDING ITEMS						
24 Tear Out - Siding, Lap, Aluminum, 0.019"	1,676.00	$1.20	SF	$2,011.20	$0.00	$2,011.20
25 Replace - Siding, Lap, Aluminum, 0.019"	1,843.60	$6.81	SF	$12,554.92	$2,101.70 ✔	$10,453.22
Includes 10% waste on quantity.						
26 Tear Out - Height Allowance, Siding	307.76	$0.08	SF	$24.62	$0.00	$24.62
27 Replace - Height Allowance, Siding	307.76	$0.38	SF	$116.95	$0.00	$116.95
28 Tear Out - J-Channel Trim, Aluminum	613.11	$0.48	LF	$294.29	$0.00	$294.29
29 Replace - J-Channel Trim, Aluminum	643.77	$3.74	LF	$2,407.70	$249.14 ✔	$2,158.56
Includes 5% waste on quantity.						
30 Tear Out - Corner Trim, Aluminum, Outside	100.00	$1.28	LF	$128.00	$0.00	$128.00
31 Replace - Corner Trim, Aluminum, Outside	105.00	$6.42	LF	$674.10	$134.19 ✔	$539.91
Includes 5% waste on quantity.						
32 Tear Out - Corner Trim, Aluminum, Inside	60.00	$1.28	LF	$76.80	$0.00	$76.80
33 Replace - Corner Trim, Aluminum, Inside	63.00	$6.57	LF	$413.91	$68.99 ✔	$344.92
Includes 5% waste on quantity.						
Debris Removal						
34 ~~Dumpster, 20 Yard~~	~~1~~	~~$600.73~~	~~EA~~	~~$600.73~~	~~$0.00~~	~~$600.73~~
Tax override applied - State applied to materials, labor, equipment.						


Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)						Claim #061296277, Stephanie Marilla
Approved						
Tax override applied - County applied to materials, labor, equipment.						
Exterior Plan - Subtotal *(20 items)*				**$20,526.32**	**$2,681.18**	**$17,845.14**
Exterior Plan - Subtotal *(20 items)*				**$20,526.32**	**$2,681.18**	**$17,845.14**

ROOFPLAN: Roofplan 2

Roof

Roof area: 581.62 SF **Squares:** 5.8 SQ **Soffit:** 175.78 SF
Eaves: 50.34 LF **Ridge:** 25.17 LF



SHINGLES							
35	ITEL, Shingles, 3-Tab, Tear Out	5.82	$73.76	SQ	$429.28	$0.00	$429.28
36	ITEL, Shingles, 3-Tab, 25 Year, Supply	6.17 (6.33)	$108.10	SQ	$684.27	$246.34	$437.93
	Materials quantity bundle rounding applied.						
	This line item includes a shingle material allowance per square, which reflects current market prices in your area. Market prices were verified by ITEL. The ITEL Asphalt Shingle Program allows you or your contractor of choice to have materials delivered directly to you. For more information on ordering shingles through ITEL, contact them at customerservice@itelinc.com or 800-890-4835.						
	Includes 6% waste on quantity.						
37	ITEL, Shingles, 3-Tab, 25 Year, Install	6.17	$155.06	SQ	$956.72	$18.26	$938.46
	Includes 6% waste on quantity.						
38	Replace - Shingles, Starter Row, Eave, Continuous	102.37	$2.18	LF	$223.17	$28.10	$195.07
	This item has been applied to the eaves+rakes of the roof.						
	Includes 6% waste on quantity.						
39	Replace - Ridge Cap Shingles, 3-Tab	27.69	$5.09	LF	$140.94	$15.20	$125.74
	Includes 10% waste on quantity.						
UNDERLAYMENTS							
40	Replace - Felt, Single Layer, 15 lb.	6.11	$36.32	SQ	$221.91	$24.85	$197.06
	Includes 5% waste on quantity.						
VENTS AND FLASHINGS							
41	Replace - Drip Edge, Eave/Rake, Aluminum, Mill Finished	101.41	$3.12	LF	$316.40	$47.00	$269.40
	Includes 5% waste on quantity.						
42	Tear Out - Gutter Cover, Good	50.34	$1.04	LF	$52.35	$0.00	$52.35
43	Replace - Gutter Cover, Good	52.86	$7.15	LF	$377.95	$74.54	$303.41
	Includes 5% waste on quantity.						
44	Tear Out - Downspout, Aluminum, 2"x3"	24.00	$1.28	LF	$30.72	$0.00	$30.72
45	Replace - Downspout, Aluminum, 2"x3"	25.20	$8.99	LF	$226.55	$40.03	$186.52
	Includes 5% waste on quantity.						
Roof - Subtotal *(14 items)*					**$3,660.26**	**$494.32**	**$3,165.94**
Roofplan 2 - Subtotal *(14 items)*					**$3,660.26**	**$494.32**	**$3,165.94**

Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

Description	Quantity	Unit Price	Per	RC	Depreciation	ACV
ESTIMATE: Structure (Your Insurance Claims Network, LLC)						Claim #061296277, Stephanie Marilla
Approved						
EXTERIOR PLAN: Exterior Plan 2						
Garage Exterior						
46 ITEL, Siding, Vinyl, Lap, Tear Out	583.00	$0.64	SF	$373.12	$0.00	$373.12
47 ITEL, Siding, Vinyl, Lap, Install	617.98	$2.54	SF	$1,569.67	$21.14	$1,548.53
Includes 6% waste on quantity.						
48 ITEL, Siding, Vinyl, Lap, Good, Supply	617.98	$0.00	SF	$0.00	$0.00	$0.00
Includes 6% waste on quantity.						
49 Replace - Vapor Barrier, Shelter/House Wrap	583.00	$0.38	SF	$221.54	$18.12	$203.42
50 Tear Out - Vapor Barrier, Shelter/House Wrap	583.00	$0.09	SF	$52.47	$0.00	$52.47
Garage Exterior - Subtotal *(5 items)*				**$2,216.80**	**$39.26**	**$2,177.54**
Exterior Plan 2 - Subtotal *(5 items)*				**$2,216.80**	**$39.26**	**$2,177.54**
Minimum Charge Adjustments						
51 Minimum Charge, Windows/Doors	1	$403.44	LS	$172.01	$0.00	$172.01
Minimum Charge Adjustments - Subtotal *(4 items)*				**$172.01**	**$0.00**	**$172.01**
Subtotal				**$34,632.02**	**$4,737.11**	**$29,894.91**

Liberty Mutual Insurance
PO Box 5014
Scranton, PA 18505-5014
Fax: (888) 268-8840

ESTIMATE: Structure (Your Insurance Claims Network, LLC) Claim #061296277, Stephanie Marilla

Approved

Total Materials:	$13,752.04
Total Labor:	$20,872.87
Total Equipment:	$7.11
Total Market Conditions:	$0.00
Subtotal:	**$34,632.02**
State 5.750% (applies to materials only, some items overridden):	$790.76
County 2.250% (applies to materials only, some items overridden):	$309.43
Subtotal:	**$35,732.21**
Add 0.00% overhead:	$0.00
Add 0.00% profit:	$0.00
Replacement Cost Value:	**$35,732.21**
Replacement Cost on Coverage Building ($312,700.00 limit):	$29,738.57
Less Code Upgrade	$(810.85)
Less Debris Removal	$(648.79)
Less Recoverable Depreciation:	$(4,203.53)
Net Actual Cash Value on Coverage Building:	**$24,075.40**
Estimate Total on Coverage Building:	**$24,075.40**
Recoverable Depreciation:	$4,203.53
Paid When Incurred: Code Upgrade	$810.85
Paid When Incurred: Debris Removal	$648.79
Net Coverage Building if Depreciation Is Recovered and Costs Are Incurred:	$29,738.57
Estimate Total on Coverage Building if Depreciation Is Recovered and Costs Are Incurred:	**$29,738.57**
Replacement Cost on Coverage Appurtenant structure ($31,270.00 limit):	$5,993.64
Less Recoverable Depreciation:	$(533.58)
Net Actual Cash Value on Coverage Appurtenant structure:	**$5,460.06**
Estimate Total on Coverage Appurtenant structure:	**$5,460.06**
Recoverable Depreciation:	$533.58
Net Coverage Appurtenant structure if Depreciation Is Recovered:	$5,993.64
Estimate Total on Coverage Appurtenant structure if Depreciation Is Recovered:	**$5,993.64**
Deductible ($1,000.00):	$(1,000.00)
Net Estimate:	**$28,535.46**
Total Net Recoverable Depreciation and Costs Incurred:	$6,196.75
Net Estimate if Depreciation Is Recovered and Costs Are Incurred:	**$34,732.21**

Finalization